

Quartzite



Limestone



NATURAL STONE

TABLA 2cm / 3cm
SLAB 3/4" / 1 1/8"



160x60 cm
63"x23 5/8"


50x100 cm
19 5/8"x9 3/8"

40x80cm
15 3/4"x31 1/2"

MULTIFORMATO 40,6x61cm / 40,6x40,6cm / 20x40,6cm / 20x20cm
MULTIFORMAT 16"x24" / 16"x16" / 7 7/8"x16" / 7 7/8"x7 7/8"



60x60cm
23 5/8"x23 5/8"

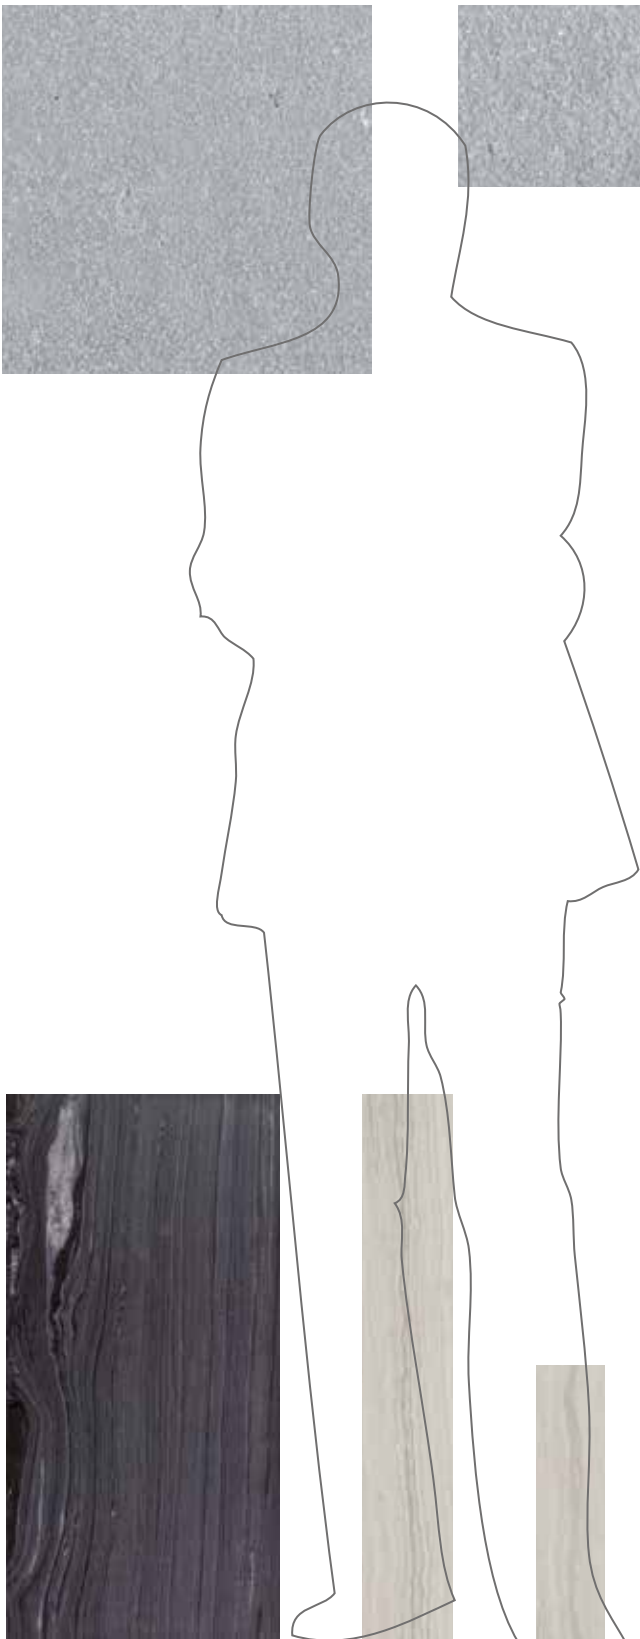

30x60cm
11 3/4"x23 5/8"



10x60cm
3 7/8"x23 5/8"



7,5x30cm
3"x11 3/4"

POLISHED

Featuring a mechanically achieved high-gloss finish.

**CLASSICO**

Featuring a mechanically achieved satin finish.

**HOME**

Through mechanical brushing, a smooth, satin, silky finish is achieved. Practical and easy to care for, it can be used on walls and floors.


**TEXTURE**

A natural, rustic finish with a rough, grooved texture is achieved by pounding the stone with pointed machine heads.

**SAND HOME**

Featuring a very slightly rough surface, achieved by sandblasting the stone.



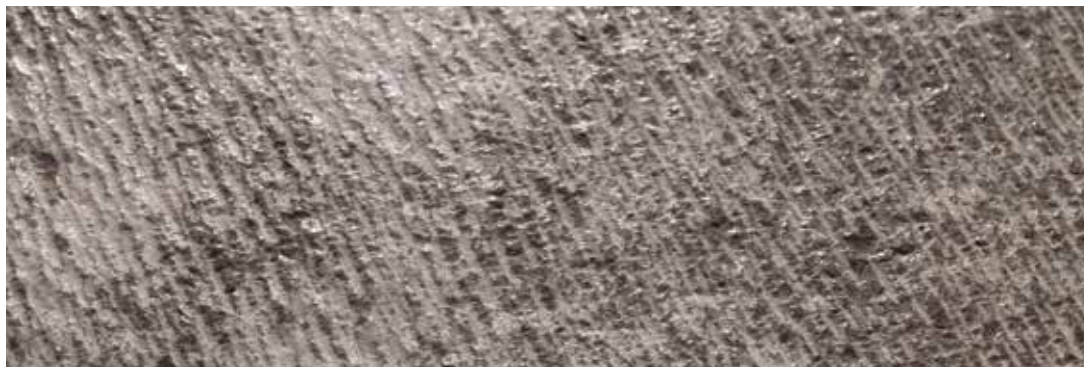

LINED HOME

Featuring an uneven, grooved finish, achieved by scratching the stone with diamond heads.




TUMBLED

The stone is naturally aged to give it a warm, traditional look.



FLAMED

Featuring a rough texture, achieved through exposure to fire.

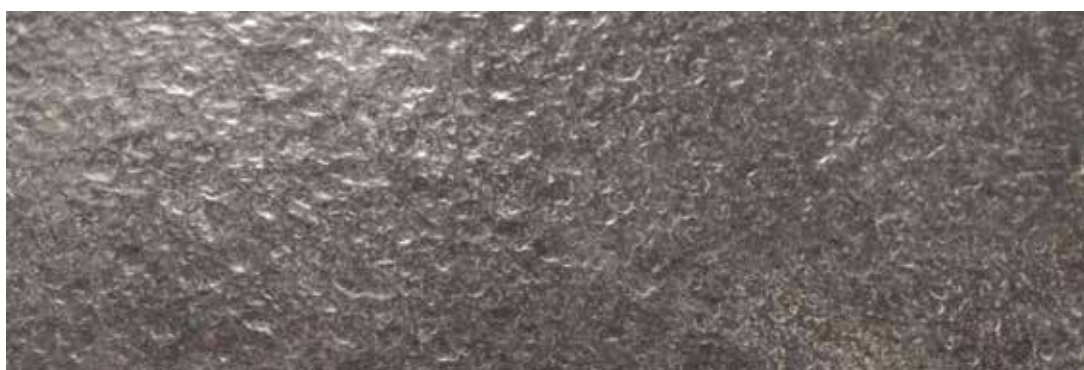


FLAMED HOME

Featuring a rough texture, achieved through exposure to fire and mechanical brushing.



NATURAL

The natural relief surface of slate and quartzite is conserved, although the inner sides are calibrated to make the stone easy to lay.

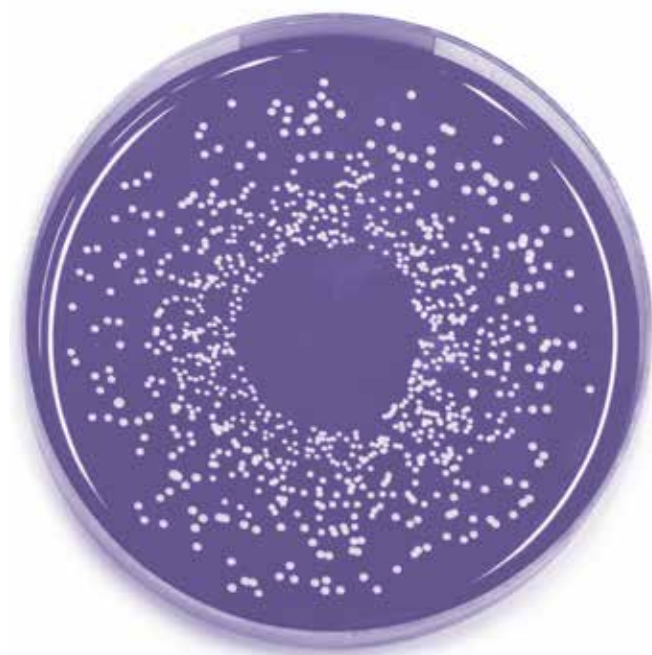

BiOprot

Is a liquid treatment. Once applied, it radically reduces the domestic bacteria most commonly found throughout the home, including kitchens and bathrooms.

This transparent, non-toxic liquid creates a barrier that prevents bacteria from growing on surfaces.

All stone products by L'Antic Colonial are protected with this treatment. With BiOprot, our stone is assured an almost unparalleled level of safety and cleanliness. The treatment has been designed with the whole family's safety and health in mind.

HOW IT WORKS

-Bioprot is based on the use of nanoclays, functionalized with silver particles.

-Bioprot's silver ions interact with the cellular membranes of bacteria, preventing nutrients from reaching the latter or leading to the release of their cellular contents-

-The nanoclay-anchored silver particles are evenly spread across the surface of the protected stone, ensuring uniform, long-lasting anti-bacterial protection.

PROPERTIES

-Based on silver, a safe inert metal for humans, whose anti-bacterial properties have been known since ancient times.

-Bioprot prevents the surface formation of fungus, mould, bacteria and other microorganisms.

-Thanks to its properties, it provides anti-microbial protection against salmonella, legionella and pseudomonas, among other bacteria.

-It prevents the build-up of odours and stains.





Floor Coverings: Persian White Pulido Bioprot 60x60x2 cm





MARBLES


BLANCO ALMERIA
PERSIAN WHITE
CAPADOCIA
BLANCO ANDES
THASSOS ICE
ARCTIC WHITE
KAYAK BEIGE
CREMA GRECIA
NAIROBI CREMA
CAPUCCINO
HABANA BROWN
HABANA DARK
A-CERO DARK

Floor Coverings: Mini Eden Texture 1L Almond 19x210x1,15 cm.
Wall Coverings: Arctic White Pulido Bioprot 40x80x1,5 cm.
Complementary products: Men[H]ir Espejo S Natural 60x90x5 cm,
Men[H]ir Crema Italia Classico Bioprot 42x42x14 cm, Men[H]ir
Mueble S 3C Natural Athenas 94x56,6x71 cm, Men[H]ir Bañera
Crema Italia-Natural Bioprot 185x90x54 cm.



ORIGIN: **EUROPE**

VARIATIONS IN SHADE





USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors*
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R11

BLANCO ALMERIA ANTICATO Bioprot

Board recommends Butech: *colorstuk rapid blanco*

	DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
	BLANCO ALMERIA ANTICATO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100000179 L112971001	G-153	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	23,16 x Cj 1019,22 x Pal
	PELDAÑO ML (CANTO RECTO)	MLx35x3 cm	100087380	G-070	-	-	-
	STEP ML (EASED EDGE)	MLx13 3/4"x1 1/8"	L100600361	-	-	-	-
	TABICA ML	MLx15x2 cm	100087379	G-060	-	-	-
	RISER ML	MLx5 7/8"x3/4"	L100600251	-	-	-	-

***NOTE:** We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.
Placement is recommended with quick-setting cement glue Super One Flex Blanco.



Floor Coverings: Capuccino Sand Home 40x80x1,5 cm.
Wall Coverings: Blanco Almeria Anticato Bioprot 30x60x1,2 cm.
Complementary products: Wood Top Nogal Warm 160x50x10 cm, Lavabo Basic Blanco Athenas Bioprot 40x40x10 cm, Hampton Nogal Warm 160x44x40 cm.



PERSIAN WHITE PULIDO B10prot

Board recommends Butech: colorstuk rapid blanco

ORIGIN: EUROPE

VARIATIONS IN SHADE

USE RECOMMENDATIONS BY PRODUCT

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
PERSIAN WHITE PULIDO BPT	30x60x1,5 cm 11 3/4"x23 5/8"x5/8"	100102697 L119294131	G-155	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	23,39 x Cj 1029,34 x Pal
PERSIAN WHITE PULIDO BPT	40x80x2 cm 15 3/4"x31 1/2"x5/8"	100142942 L108025901	G-163	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	18,48 x Cj 1441,67 x Pal
PERSIAN WHITE PULIDO BPT	60x60x2 cm 23 5/8"x23 5/8"x3/4"	100098384 L100200191	G-163	1 x Cj 40 x Pal	0,36 x Cj 14,40 x Pal	20,80 x Cj 831,80 x Pal
PERSIAN WHITE PULIDO BPT	Tabla 2 cm Slab 3/4"	100155542 L108029771	G-157	-	-	-
PERSIAN WHITE PULIDO BPT	Tabla 3 cm Slab 1 1/8"	100155543 L108029781	G-171	-	-	-
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100126845 L108023331	G-070	-	-	-
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100126866 L108023351	G-060	-	-	-

*NOTE: Polished materials with continuous exposure to sunlight may tarnish. Placement is recommended with quick-setting cement glue Super One Flex Blanco.



PERSIAN WHITE CLASSICO B10prot

Board recommends Butech: colorstuk rapid blanco

ORIGIN: EUROPE

VARIATIONS IN SHADE

USE RECOMMENDATIONS BY PRODUCT

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
PERSIAN WHITE CLASSICO BPT	30x60x1,5 cm 11 3/4"x23 5/8"x1/2"	100142837 L112995691	G-155	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	23,39 x Cj 1029,07 x Pal
PERSIAN WHITE CLASSICO BPT	40x80x2 cm 15 3/4"x31 1/2"x5/8"	100142941 L108025891	G-163	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	18,47 x Cj 1440,66 x Pal
PERSIAN WHITE CLASSICO BPT	60x60x2 cm 23 5/8"x23 5/8"x3/4"	100142838 L116688241	G-163	1 x Cj 40 x Pal	0,36 x Cj 14,40 x Pal	20,78 x Cj 831,20 x Pal
PERSIAN WHITE CLASSICO BPT	Tabla 2 cm Slab 3/4"	100155540 L108029741	G-157	-	-	-
PERSIAN WHITE CLASSICO BPT	Tabla 3 cm Slab 1 1/8"	100155541 L108029731	G-171	-	-	-
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100156697 L108030191	G-070	-	-	-
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100156707 L108030201	G-060	-	-	-

*NOTE: We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order. Placement is recommended with quick-setting cement glue Super One Flex Blanco.



ORIGIN: **ASIA**

VARIATIONS IN SHADE



Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R12

CAPADOCIA SAND HOME Bioprot

Board recommends Butech: *colorstuk rapid blanco*

	DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
	CAPADOCIA SAND HOME BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100114124 L108020551	G-171	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	25 x Cj 1100,18 x Pal
	PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100126839 L108023501	G-070	- -	- -	- -
	TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100126859 L108024481	G-060	- -	- -	- -

***NOTE:** Placement is recommended with quick-setting cement glue Super One Flex Blanco.



Floor Coverings: Capadocia Sand Home Bioprot 30x60x1,2 cm.



ORIGIN: ASIA

VARIATIONS IN SHADE

USE RECOMMENDATIONS BY PRODUCT

BLANCO ANDES PULIDO BIOprot

Board recommends Butech: colorstuk rapid gris

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
BLANCO ANDES PULIDO BPT	30x60x1 cm 11 3/4"x23 5/8"x3/8"	100153274 L119294221	G-169	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	10,12 x Cj 445,28 x Pal
BLANCO ANDES PULIDO BPT	40x80x1 cm 15 3/4"x31 1/2"x3/8"	100153275 L108028701	G-177	2 x Cj 156 x Pal	0,64 x Cj 49,92 x Pal	17,16 x Cj 1338,32 x Pal
BLANCO ANDES PULIDO BPT	60x60x1 cm 23 5/8"x23 5/8"x3/8"	100153276 L100200451	G-177	2 x Cj 92 x Pal	0,72 x Cj 33,12 x Pal	19,44 x Cj 894,24 x Pal
BLANCO ANDES PULIDO BPT	Tabla 2 cm Slab 3/4"	100153277 L108028711	G-168	-	-	-
BLANCO ANDES PULIDO BPT	Tabla 3 cm Slab 1 1/8"	100153278 L108028731	G-182	-	-	-
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100156699 L108030171	G-070	-	-	-
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100156705 L108030211	G-060	-	-	-

*NOTE: Polished materials with continuous exposure to sunlight may tarnish. Placement is recommended with quick-setting cement glue Super One Flex Blanco.



ORIGIN: ASIA

VARIATIONS IN SHADE

USE RECOMMENDATIONS BY PRODUCT

BLANCO ANDES CLASSICO BIOprot

Board recommends Butech: colorstuk rapid gris

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
BLANCO ANDES CLASSICO BPT	30x60x1 cm 11 3/4"x23 5/8"x3/8"	100153179 L112995721	G-169	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	10,12 x Cj 445,28 x Pal
BLANCO ANDES CLASSICO BPT	40x80x1 cm 15 3/4"x31 1/2"x3/8"	100153270 L108028681	G-177	2 x Cj 156 x Pal	0,64 x Cj 49,92 x Pal	17,16 x Cj 1338,32 x Pal
BLANCO ANDES CLASSICO BPT	60x60x1 cm 23 5/8"x23 5/8"x3/8"	100153271 L116688251	G-177	2 x Cj 92 x Pal	0,72 x Cj 33,12 x Pal	19,44 x Cj 894,24 x Pal
BLANCO ANDES CLASSICO BPT	Tabla 2 cm Slab 3/4"	100153272 L108028721	G-168	-	-	-
BLANCO ANDES CLASSICO BPT	Tabla 3 cm Slab 1 1/8"	100153273 L108028691	G-182	-	-	-
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100156696 L108030131	G-070	-	-	-
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100156726 L108030251	G-060	-	-	-

*NOTE: We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order. Placement is recommended with quick-setting cement glue Super One Flex Blanco.



THASSOS ICE PULIDO BIOprot

Board recommends Butech: *colorstuk rapid gris*



ORIGIN: **EUROPE**

VARIATIONS IN SHADE



Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
THASSOS ICE PULIDO BPT	40x80x2 cm 15 3/4"x31 1/2"x5/8"	100146074 L108026381	G-192	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	18,02 x Cj 1405,79 x Pal

***NOTE:** Polished materials with continuous exposure to sunlight may tarnish.
Placement is recommended with quick-setting cement glue Super One Flex Blanco.



Floor Coverings: Grey Aged Home Bioprot 50x100x2 cm.
Wall Coverings: Thassos Ice Pulido Bioprot 40x80x2 cm, Annapurna Home Bioprot 40x80x1,5 cm.
Complementary products: Conjunto Zen Nogal Warm Blanco Athenas Classico Bioprot 87,5x40x47 cm.



ORIGIN: EUROPE

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors Outdoor Floors

Indoor Walls Outdoor Walls

Shower Walls Shower Floors

Worktops Swimming-Pool Surrounds

Light Traffic Medium Traffic

High Traffic Ramp Test Rating (DIN 51130): R9

ARCTIC WHITE PULIDO BiOprot
Board recommends Butech: colorstuk rapid gris

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
ARCTIC WHITE PULIDO BPT	30x60x1,5 cm 11 3/4"x23 5/8"x1/2"	100146821 L119294201	G-155	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	23,10 x Cj 1016,40 x Pal
ARCTIC WHITE PULIDO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x1/2"	100146008 L108026371	G-163	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	11,32 x Cj 883,04 x Pal
ARCTIC WHITE PULIDO BPT	Tabla 2 cm Slab 3/4"	100155457 L108029471	G-157	-	-	-
ARCTIC WHITE PULIDO BPT	Tabla 3 cm Slab 1 1/8"	100155458 L108029521	G-171	-	-	-
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100156698 L108030161	G-070	-	-	-
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100156725 L108030261	G-060	-	-	-

*NOTE: Polished materials with continuous exposure to sunlight may tarnish. Placement is recommended with quick-setting cement glue Super One Flex Blanco.



Wall Coverings: Arctic White Pulido Bioproto Pedido especial | Special order.
Complementary products: Lavabo Basic Stand Blanco Athenas Classico Bioproto 40x40x85 cm, Plato ducha Basic Blanco Athenas Classico Bioproto 90x90x5 cm.




KAYAK BEIGE PULIDO BiOprot

Board recommends Butech: *colorstuk rapid marfil*

Bevel

ORIGIN: **ASIA**

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
KAYAK BEIGE PULIDO BPT	30x60x1 cm 11 3/4"x23 5/8"x3/8"	100156153 L119294241	G-166	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	17,63 x Cj 775,98 x Pal
KAYAK BEIGE PULIDO BPT	40x80x1 cm 15 3/4"x31 1/2"x3/8"	100156154 L108029991	G-175	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	8,94 x Cj 697,47 x Pal
KAYAK BEIGE PULIDO BPT	60x60x1 cm 23 5/8"x23 5/8"x3/8"	100156155 L100200481	G-175	2 x Cj 92 x Pal	0,72 x Cj 33,12 x Pal	20,12 x Cj 925,52 x Pal
KAYAK BEIGE PULIDO BPT	Tabla 2 cm Slab 3/4"	100156156 L108029981	G-182	- -	- -	- -
KAYAK BEIGE PULIDO BPT	Tabla 3 cm Slab 1 1/8"	100156157 L108029971	G-190	- -	- -	- -
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100156710 L108030181	G-070	- -	- -	- -
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100156706 L108030221	G-060	- -	- -	- -

***NOTE:** Polished materials with continuous exposure to sunlight may tarnish.



Floor Coverings: Kayak Beige Pulido BiOprot 40x80x1 cm.



ORIGIN: ASIA

VARIATIONS IN SHADE

USE RECOMMENDATIONS BY PRODUCT

CREMA GRECIA ANTICATO BIOprot

Board recommends Butech: colorstuk rapid marfil

	DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
	CREMA GRECIA ANTICATO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100000184 L112982001	G-153	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	25 x Cj 1100,18 x Pal
	PELDAÑO ML (CANTO RECTO)	MLx35x3 cm	100087370	G-070	-	-	-
	STEP ML (EASED EDGE)	MLx13 3/4"x1 1/8"	L100600381	-	-	-	-
	TABICA ML	MLx15x2 cm	100087369	G-060	-	-	-
	RISER ML	MLx5 7/8"x3/4"	L100600321	-	-	-	-

*NOTE: We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.



ORIGIN: ASIA

VARIATIONS IN SHADE

USE RECOMMENDATIONS BY PRODUCT

CREMA GRECIA CLASSICO BIOprot

Board recommends Butech: colorstuk rapid marfil

	DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
	CREMA GRECIA CLASSICO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100000188 L112992001	G-166	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	24 x Cj 1056 x Pal
	CREMA GRECIA CLASSICO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100082211 L108008941	G-177	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	11,50 x Cj 897 x Pal
	CREMA GRECIA CLASSICO BPT	60x60x2 cm 23 5/8"x23 5/8"x3/4"	100003812 L113098021	G-177	1 x Cj 40 x Pal	0,36 x Cj 14,40 x Pal	20 x Cj 800 x Pal
	CREMA GRECIA CLASSICO BPT	Tabla 2 cm Slab 3/4"	100155525 L108029541	G-181	-	-	-
	CREMA GRECIA CLASSICO BPT	Tabla 3 cm Slab 1 1/8"	100155526 L108029511	G-190	-	-	-
	PELDAÑO ML (CANTO RECTO)	MLx35x3 cm	100086353	G-070	-	-	-
	STEP ML (EASED EDGE)	MLx13 3/4"x1 1/8"	L108010361	-	-	-	-
	TABICA ML	MLx15x2 cm	100086371	G-060	-	-	-
	RISER ML	MLx5 7/8"x3/4"	L108010411	-	-	-	-



*NOTE: We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.



NAIROBI CREMA CLASSICO BIOprot[®]

Board recommends Butech: *colorstuk rapid marfil*



DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
NAIROBI CREMA CLASSICO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100089719 L112995351	G-163	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	24,22 x Cj 1065,68 x Pal
NAIROBI CREMA CLASSICO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100089720 L108011571	G-175	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,20 x Cj 1029,6 x Pal
NAIROBI CREMA CLASSICO BPT	60x60x1,5 cm 23 5/8"x23 5/8"x5/8"	100098366 L116688121	G-171	1 x Cj 40 x Pal	0,36 x Cj 14,40 x Pal	14,72 x Cj 588,92 x Pal
NAIROBI CREMA CLASSICO BPT	Tabla 2 cm Slab 3/4"	100155506 L108029711	G-166	- -	- -	- -
NAIROBI CREMA CLASSICO BPT	Tabla 3 cm Slab 1 1/8"	100155507 L108029761	G-177	- -	- -	- -
 PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100126844 L108023481	G-070	- -	- -	- -
 TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100126865 L108023301	G-060	- -	- -	- -



***NOTE:** We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.



NAIROBI CREMA PULIDO BIOprot[®]

Board recommends Butech: *colorstuk rapid marfil*



DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
NAIROBI CREMA PULIDO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100045556 L100300071	G-163	4 x Cj 132 x Pal	0,72 x Cj 31,68 x Pal	24,22 x Cj 1065,68 x Pal
NAIROBI CREMA PULIDO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100073337 L108006921	G-171	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	11,50 x Cj 897 x Pal
NAIROBI CREMA PULIDO BPT	60x60x1,5 cm 23 5/8"x23 5/8"x5/8"	100045557 L100300081	G-171	1 x Cj 40 x Pal	0,36 x Cj 14,40 x Pal	15,71 x Cj 628,52 x Pal
NAIROBI CREMA PULIDO BPT	Tabla 2 cm Slab 3/4"	100155508 L108029701	G-166	- -	- -	- -
NAIROBI CREMA PULIDO BPT	Tabla 3 cm Slab 1 1/8"	100155509 L108029721	G-167	- -	- -	- -
 PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100086358 L108010251	G-070	- -	- -	- -
 TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100086357 L108010291	G-060	- -	- -	- -

***NOTE:** Polished materials with continuous exposure to sunlight may tarnish.

ORIGIN: **ASIA**

VARIATIONS IN SHADE




USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors*
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9



ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT


Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R13

NAIROBI CREMA TEXTURE HOME BiOprot

Board recommends Butech: colorstuk rapid marfil

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
NAIROBI CREMA TEXTURE HOME BPT	Multiformato Multiformat	100103992 L108017251	G-155	1 x Cj 23 x Pal	0,72 x Cj 16,56 x Pal	21,43 x Cj 492,78 x Pal

MULTIFORMAT



Instructions for laying
Packet is served. 0,74 m² per pack.
composed of 40,6x40,6x1,2 (2 pzs.).
20x20x1,2 (2 pzs.). 40,6x61x1,2 (1 pzs.).
20x40,6x1,2 (1 pzs.)



Floor Coverings: Nairobi Crema Pulido BiOprot 60x60x1,5 cm.



CAPUCCINO LINED HOME BIOprot®
Board recommends Butech: *colorstuk rapid beige*

ORIGIN: **ASIA**

VARIATIONS IN SHADE

Uniform
 Slight
 Moderate
 Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R12

	DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
	CAPUCCINO LINED HOME BPT	30x60x1,5 cm 11 3/4"x23 5/8"x5/8"	100114601 L108020771	G-166	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	17,82 x Cj 784,08 x Pal
	CAPUCCINO LINED HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100092935 L108013271	G-177	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,69 x Cj 1068 x Pal
	PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100126840 L108023551	G-070	- -	- -	- -
	TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100126860 L108023531	G-060	- -	- -	- -



CAPUCCINO SAND HOME BIOprot®
Board recommends Butech: *colorstuk rapid beige*

ORIGIN: **ASIA**

VARIATIONS IN SHADE

Uniform
 Slight
 Moderate
 Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R12

	DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
	CAPUCCINO SAND HOME BPT	30x60x1,5 cm 11 3/4"x23 5/8"x5/8"	100114602 L108020741	G-166	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	17,82 x Cj 784,08 x Pal
	CAPUCCINO SAND HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100096778 L108015071	G-177	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,22 x Cj 1031 x Pal
	PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100126841 L108023541	G-070	- -	- -	- -
	TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100126861 L108024431	G-060	- -	- -	- -



ORIGIN: ASIA

VARIATIONS IN SHADE



Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCT

- | | |
|---------------|---|
| Indoor Floors | Outdoor Floors |
| Indoor Walls | Outdoor Walls |
| Shower Walls | Shower Floors |
| Worktops | Swimming-Pool Surrounds |
| Light Traffic | Medium Traffic |
| High Traffic | Ramp Test Rating (DIN 51130): R9 |

CAPUCCINO PULIDO BiOprot

Board recommends Butech: colorstuk rapid beige



Bevel

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
CAPUCCINO PULIDO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100000160 L112925161	G-153	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	24,09 x Cj 1060,05 x Pal
CAPUCCINO PULIDO BPT	60x60x2 cm 23 5/8"x23 5/8"x3/4"	100000462 L116686001	G-171	1 x Cj 40 x Pal	0,36 x Cj 14,40 x Pal	21,34 x Cj 853,52 x Pal
CAPUCCINO PULIDO BPT	Tabla 2 cm Slab 3/4"	100155523 L108029481	G-171	-	-	-
CAPUCCINO PULIDO BPT	Tabla 3 cm Slab 1 1/8"	100155524 L108029551	G-183	-	-	-
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100086352 L108010241	G-070	-	-	-
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100086351 L108010371	G-060	-	-	-

*NOTE: Polished materials with continuous exposure to sunlight may tarnish.




Floor Coverings: Capuccino Pulido Bioprot 60x60x2 cm.

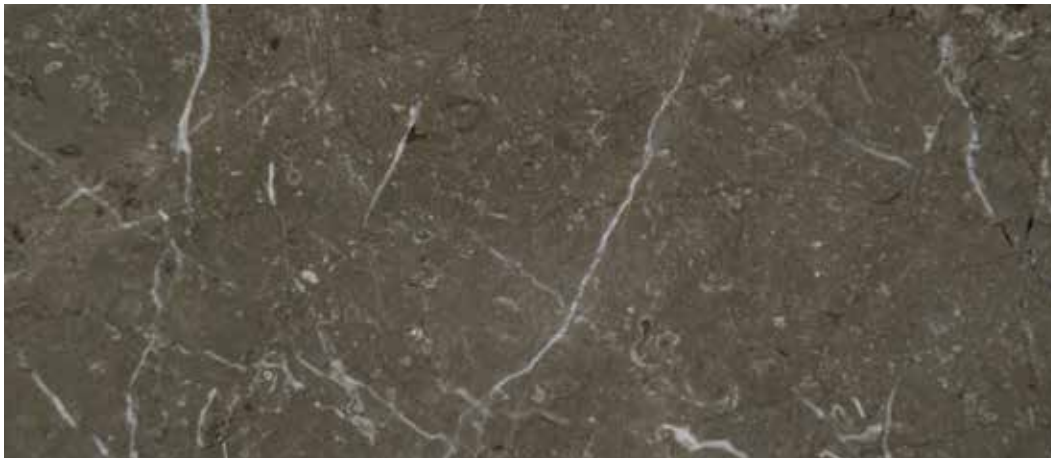**HABANA BROWN CLASSICO B10prot**Board recommends Butech: *colorstuk rapid cemento*ORIGIN: **ASIA****VARIATIONS IN SHADE****USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors*
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
HABANA BROWN CLASSICO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100092925 L112995361	G-157	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	24,84 x Cj 1092,96 x Pal
HABANA BROWN CLASSICO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100092715 L108012931	G-171	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	113,06 1019 x Pal
HABANA BROWN CLASSICO BPT	Tabla 2 cm Slab 3/4"	100155531 L108029611	G-177	-	-	-
HABANA BROWN CLASSICO BPT	Tabla 3 cm Slab 1 1/8"	100155532 L108029591	G-183	-	-	-
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100126830 L108023431	G-070	-	-	-
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100126863 L108023341	G-060	-	-	-


***NOTE:** We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.

**HABANA BROWN PULIDO B10prot**Board recommends Butech: *colorstuk rapid antracita*ORIGIN: **ASIA****VARIATIONS IN SHADE****USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
HABANA BROWN PULIDO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100001541 L150501001	G-163	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	24,84 x Cj 1092,96 x Pal
HABANA BROWN PULIDO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100073336 L108006911	G-171	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,64 x Cj 1064 x Pal
HABANA BROWN PULIDO BPT	Tabla 2 cm Slab 3/4"	100155533 L108029571	G-177	-	-	-
HABANA BROWN PULIDO BPT	Tabla 3 cm Slab 1 1/8"	100155533 L108029661	G-183	-	-	-
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100087390 L100600161	G-070	-	-	-
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100087389 L100600211	G-060	-	-	-

***NOTE:** Polished materials with continuous exposure to sunlight may tarnish.

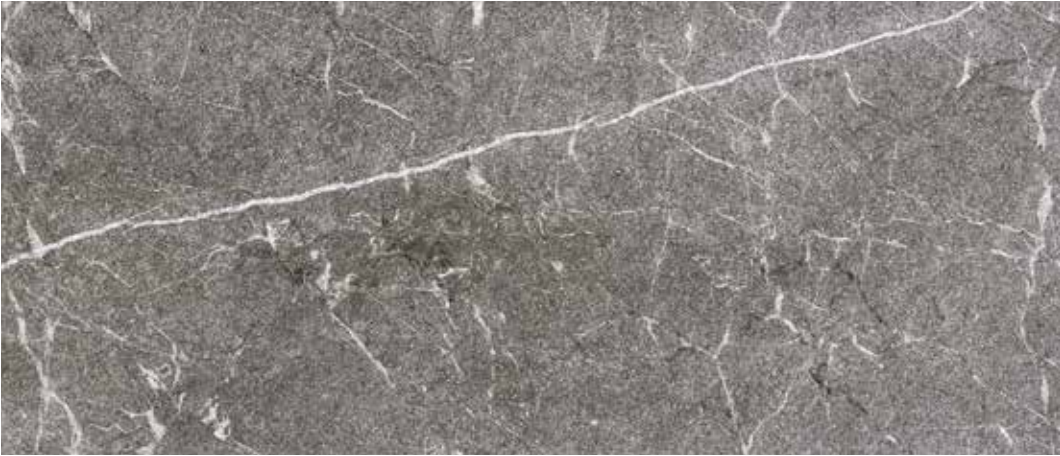

HABANA BROWN SAND HOME BPT

Board recommends Butech: colorstuk rapid manhattan

ORIGIN: ASIA

VARIATIONS IN SHADE

USE RECOMMENDATIONS BY PRODUCT

	DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
	HABANA BROWN SAND HOME BPT	30x60x1,5 cm 11 3/4"x23 5/8"x5/8"	100115881 L108021111	G-169	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	23,29 x Cj 1024,58 x Pal
	HABANA BROWN SAND HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100096784 L108015081	G-181	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,44 x Cj 1048 x Pal
	PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100126832 L108023401	G-070	-	-	-
	TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100126852 L108024441	G-060	-	-	-



HABANA BROWN LINED HOME BPT

Board recommends Butech: colorstuk rapid manhattan

ORIGIN: ASIA

VARIATIONS IN SHADE

USE RECOMMENDATIONS BY PRODUCT

	DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
	HABANA BROWN LINED HOME BPT	30x60x1,5 cm 11 3/4"x23 5/8"x5/8"	100115880 L108021121	G-169	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	21,89 x Cj 1024,58 x Pal
	HABANA BROWN LINED HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100092714 L108012941	G-181	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,46 x Cj 1050 x Pal
	PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100126831 L108023411	G-070	-	-	-
	TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100126851 L108023461	G-060	-	-	-

ORIGIN: **EUROPE****VARIATIONS IN SHADE**

Uniform



Slight



Moderate



Pronounced

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

Bevel

HABANA DARK PULIDO BioprotBoard recommends Butech: *colorstuk rapid antracita*

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
HABANA DARK PULIDO BPT	30x60x1,5 cm 11 3/4"x23 5/8"x5/8"	100086382 L119294091	G-173	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	21,89 x Cj 963,20 x Pal
HABANA DARK PULIDO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100086383 L108010481	G-177	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,79 x Cj 1076 x Pal
HABANA DARK PULIDO BPT	60x60x2 cm 23 5/8"x23 5/8"x3/4"	100086384 L100200081	G-185	1 x Cj 40 x Pal	0,36 x Cj 14,40 x Pal	19,46 x Cj 778,32 x Pal
HABANA DARK PULIDO BPT	Tabla 2 cm Slab 3/4"	100155502 L108029671	G-177	-	-	-
HABANA DARK PULIDO BPT	Tabla 3 cm Slab 1 1/8"	100155503 L108029691	G-190	-	-	-
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100087392 L100600511	G-070	-	-	-
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100087391 L100600331	G-060	-	-	-

***NOTE:** Polished materials with continuous exposure to sunlight may tarnish.
Placement is recommended with quick-setting cement glue Super One.



Floor Coverings: Nairobi Crema Classico Bioprot 40x80x1,5 cm.

Wall Coverings: Habana Dark Pulido Bioprot 40x80x1,5 cm, Metal Acero Highlights (2) 30,5x30,5x0,8 cm.

Complementary products: Shima Crema Nilo Classico Bioprot 169x48x9 cm, Hampton Nogal Warm 160x44x40 cm.



ORIGIN: EUROPE

VARIATIONS IN SHADE



Uniform



Slight



Moderate



Pronounced

USE RECOMMENDATIONS BY PRODUCT

- | | |
|---------------|----------------------------------|
| Indoor Floors | Outdoor Floors |
| Indoor Walls | Outdoor Walls |
| Shower Walls | Shower Floors |
| Worktops | Swimming-Pool Surrounds |
| Light Traffic | Medium Traffic |
| High Traffic | Ramp Test Rating (DIN 51130): R9 |

A-CERO DARK CLASSICO BLOprot

Board recommends Butech: colorstuk rapid antracita

Bevel

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
A-CERO DARK CLASSICO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100098034 L108015901	G-177	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,72 x Cj 1070 x Pal



Floor Coverings: A-cero Dark Bioprot 40x80x1,5 cm.
Wall Coverings: A-cero Dark Bioprot 40x80x1,5 cm.





TRAVERTINES

MOKA

TOSCANO


SILVER WOOD

SILK WOOD



Floor Coverings: Silver Wood Classico Bioprot 40x80x1,5 cm.

Wall Coverings: Silver Wood Classico Bioprot 40x80x1,5 cm.

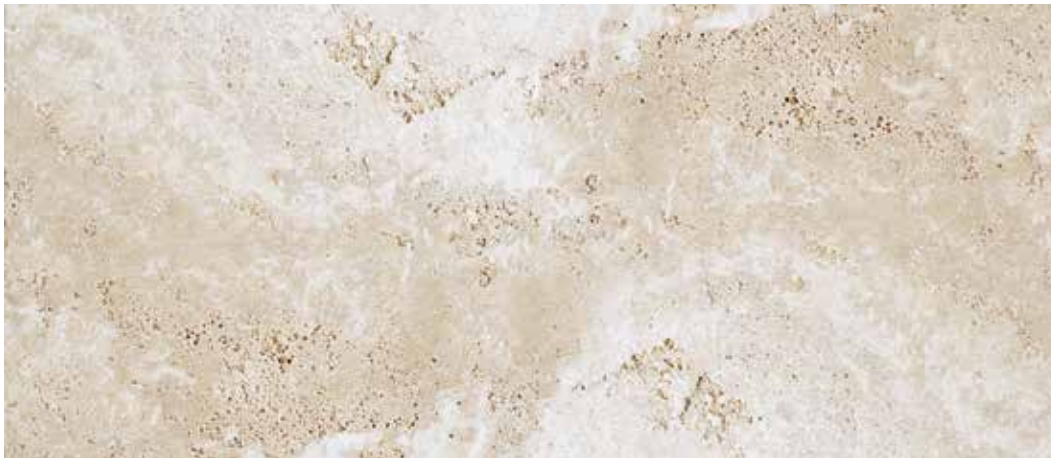
Complementary products: Men(H)ir Crema Italia Classico Bioprot 42x42x14 cm, Men(H)ir Encimera L Roble Antracita 150x60x5 cm, Men(H)ir Mueble L Crema Italia-Roble Antracita 183x59,5x22 cm, Men(H)ir Plato de Ducha D Crema Italia Classico Bioprot 150x92x5 cm, Men(H)ir Espejo Roble Antracita 90x60 cm, Men(H)ir Estante Vertical I Roble Antracita 90x30x25,7 cm.

**MOKA ANTICATO BTP**Board recommends Butech: **colorstuk rapid beige**ORIGIN: **ASIA****VARIATIONS IN SHADE****USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors*
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R11



	DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
	MOKA ANTICATO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100000183 L112981001	G-153	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	23,16 x Cj 1019,22 x Pal
	PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100126843 L107600681	G-070	- -	- -	- -
	TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100126864 L107600711	G-060	- -	- -	- -

***NOTE:** We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.
Occasionally holes may appear after installation, you can easily repaired with grout.

**MOKA CLASSICO BTP**Board recommends Butech: **colorstuk rapid marfil**ORIGIN: **ASIA****VARIATIONS IN SHADE****USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors*
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

Bevel


	DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
	MOKA CLASSICO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100000187 L112991001	G-163	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	21,03 x Cj 925,41 x Pal
	MOKA CLASSICO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100073340 L108006961	G-177	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	12,65 x Cj 997 x Pal
	MOKA CLASSICO BPT	60x60x2 cm 23 5/8"x23 5/8"x3/4"	100000456 L116661501	G-171	1 x Cj 40 x Pal	0,36 x Cj 14,40 x Pal	17,87 x Cj 714,84 x Pal
	MOKA CLASSICO BPT	Tabla 2 cm Slab 3/4"	100155504 L108029751	G-173	- -	- -	- -
	MOKA CLASSICO BPT	Tabla 3 cm Slab 1 1/8"	100155505 L108029681	G-183	- -	- -	- -
	PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100086359 L108010341	G-070	- -	- -	- -
	TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100086372 L108010421	G-060	- -	- -	- -

***NOTE:** We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.
Not recommended for outdoor use in areas at risk of frost.
Occasionally holes may appear after installation, you can easily repaired with grout.



ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors*
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R11


TOSCANO ANTICATO BiOprot

Board recommends Butech: colorstuk rapid beige

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
TOSCANO ANTICATO BPT	Multiformato Multiformat	100107322 L107600221	G-140	1 x Cj 23 x Pal	0,72 x Cj 16,56 x Pal	23,57 x Cj 542,20 x Pal

***NOTE:** We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.
Occasionally holes may appear after installation, you can easily repaired with grout.

MULTIFORMAT



Instructions for laying

Packet is served. 0,74 m² per pack.
composed of 40,6x40,6x1,2 (2 pzs.).
20x20x1,2 (2 pzs.). 40,6x61x1,2 (1 pzs.).
20x40,6x1,2 (1 pzs.)




Floor Coverings: Multiformato Toscano Anticato BiOprot.



ORIGIN: **ASIA**

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors*
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

SILVER WOOD CLASSICO Bioprot

Board recommends Butech: *colorstuk rapid gris*



DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
SILVER WOOD CLASSICO BPT	7,5x30x1,2 cm 3"x11 3/4"x1/2"	100116171 L108021211	G-168	24 x Cj 2040 x Pal	0,54 x Cj 45,90 x Pal	17,97 x Cj 1527,96 x Pal
SILVER WOOD CLASSICO BPT	10x60x1,2 cm 3 7/8"x23 5/8"x1/2"	100116170 L108021221	G-173	8 x Cj 480 x Pal	0,48 x Cj 28,80 x Pal	15,69 x Cj 941,76 x Pal
SILVER WOOD CLASSICO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100110502 L112995631	G-181	4 x Cj 176 x Pal	0,73 x Cj 32 x Pal	22,48 x Cj 989,12 x Pal
SILVER WOOD CLASSICO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100114132 L108020501	G-183	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	12,93 x Cj 1008,15 x Pal
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100126848 L108023511	G-070	- -	- -	- -
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100126869 L108023311	G-060	- -	- -	- -

***NOTE:** We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.
Not recommended for outdoor use in areas at risk of frost.
Occasionally holes may appear after installation, you can easily repaired with grout.



Floor Coverings: Silk Wood Classico Bioprot.
Wall Coverings: Silver Wood Classico Bioprot, Aichi Mix Wood 29,8x29,8x1 cm.



ORIGIN: **ASIA**

VARIATIONS IN SHADE



Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCT

- | | |
|---------------|---|
| Indoor Floors | Outdoor Floors* |
| Indoor Walls | Outdoor Walls |
| Shower Walls | Shower Floors |
| Worktops | Swimming-Pool Surrounds |
| Light Traffic | Medium Traffic |
| High Traffic | Ramp Test Rating (DIN 51130): R9 |

SILK WOOD CLASSICO B10prot

Board recommends Butech: *colorstuk rapid gris*

Bevel

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
SILK WOOD CLASSICO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100120899 L112995651	G-181	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	23,66 x Cj 1041,22 x Pal
SILK WOOD CLASSICO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100120900 L108021961	G-183	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	12,91 x Cj 1007,45 x Pal

***NOTE:** We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.
Not recommended for outdoor use in areas at risk of frost.
Occasionally holes may appear after installation, you can easily repaired with grout.



Floor Coverings: Silk Wood Classico Bioprot.
Wall Coverings: Silver Wood Classico Bioprot, Aichi Mix Wood 29,8x29,8x1 cm.





QUARTZITES

CHENNAI WHITE
SHERPA BROWN
LAGOS BLACK
ANNAPURNA

Floor Coverings: Grey Aged Home Bioprot 50x100x2 cm.
Wall Coverings: Annapurna Home Bioprot 40x80x1,5 cm,
Thassos Ice Pulido Bioprot 40x80x2 cm.

Complementary products: Conjunto Zen Nogal Warm Blanco
Athenas Classico Bioprot 87,5x40x47 cm, Plato de Ducha Zen
Blanco Athenas Classico Bioprot 120x90x5 cm.




CHENNAI WHITE FLAMED HOME Bioprot

Board recommends Butech: colorstuk rapid gris

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R11

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
CHENNAI WHITE FLAMED HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100086252 L107000151	G-150	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	14,33 x Cj 1117,82 x Pal



Wall Coverings: Chennai White Flamed Home Bioprot 40x80x1,5 cm.
Complementary products: Geisha Crema Nilo Bioprot 84,5x48x9 cm, Khoa Light Caliza Moka Bioprot 185x90x54 cm, Mylos Light Stone Crema Nilo Bioprot 90x90x3 cm.



ORIGIN: ASIA

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors Outdoor Floors

Indoor Walls Outdoor Walls

Shower Walls Shower Floors

Worktops Swimming-Pool Surrounds

Light Traffic Medium Traffic

High Traffic Ramp Test Rating (DIN 51130): R10

SHERPA BROWN HOME BIOPROT
Board recommends Butech: colorstuk rapid antracita

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
SHERPA BROWN HOME BPT	30x60x1,5 cm 11 3/4"x23 5/8"x5/8"	100081826 L112995131	G-163	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	23,51 x Cj 1034,48 x Pal
SHERPA BROWN HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100073338 L106200121	G-166	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,93 x Cj 1086,85 x Pal
SHERPA BROWN HOME BPT	60x60x1,5 cm 23 5/8"x23 5/8"x5/8"	100098379 L107000571	G-166	1 x Cj 40 x Pal	0,36 x Cj 14,40 x Pal	15,53 x Cj 621 x Pal
SHERPA BROWN HOME BPT	80x80x1,5 cm 31 1/2"x31 1/2"x5/8"	100088499 L106200381	G-181	1 x Cj 37 x Pal	0,64 x Cj 23,68 x Pal	27,86 x Cj 1030,82 x Pal
SHERPA BROWN HOME BPT	Tabla 2 cm Slab 3/4"	100155574 L107601051	G-166	-	-	-
PELDAÑO ML (CANTO RECTO)	MLx35x3 cm	100126847	G-070	-	-	-
STEP ML (EASED EDGE)	MLx13 3/4"x1 1/8"	L107600691		-	-	-
TABICA ML	MLx15x2 cm	100126870	G-060	-	-	-
RISER ML	MLx5 7/8"x3/4"	L107600721		-	-	-



Floor Coverings: Eden 1L Polar 20x240x2 cm.
Wall Coverings: Sherpa Brown Home Bioprot 80x80x1,5 cm.




LAGOS BLACK HOME BiOprot

Board recommends Butech: colorstuk rapid negro

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LAGOS BLACK HOME BPT	30x60x1,5 cm 11 3/4"x23 5/8"x5/8"	100120894 L107600251	G-155	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	41,74 x Cj 1836,78 x Pal
LAGOS BLACK HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100120895 L107600241	G-158	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,91 x Cj 1085,37 x Pal



Wall Coverings: Lagos Black Home Bioprot 40x80x1,5 cm.



ORIGIN: ASIA

VARIATIONS IN SHADE

Uniform

Slight

Moderate

Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors

Outdoor Floors

Indoor Walls

Outdoor Walls

Shower Walls

Shower Floors

Worktops

Swimming-Pool Surrounds

Light Traffic

Medium Traffic

High Traffic

Ramp Test Rating (DIN 51130): R10

ANAPURNA HOME BiOprot

Board recommends Butech: colorstuk rapid gris

Bevel

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
ANAPURNA HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100146004 L107600961	G-166	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	12,55 x Cj 979,05 x Pal



Floor Coverings: Grey Aged Home Bioprot 50x100x2 cm.
Wall Coverings: Annapurna Home Bioprot 40x80x1,5 cm, Thassos Ice Pulido Bioprot 40x80x2 cm.
Complementary products: Conjunto Zen Nogal Warm Blanco Athenas Classico Bioprot 87,5x40x47 cm.





LIMESTONES

CALGARY
A-CERO GLOSS
SAHARA
CREAM AGED
VANCOUVER
GREY AGED
QUEBEC
BOSTWANA
BURKHARA

Floor Coverings: Calgary Classico Bioprot.
Wall Coverings: Calgary Classico Bioprot.



ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

CALGARY CLASSICO BiOprot
Board recommends Butech: *colorstuk rapid blanco / marfil*



DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
CALGARY CLASSICO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100098313 L112995511	G-141	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	23,18 x Cj 1020,10 x Pal
CALGARY CLASSICO BPT	60x60x1,5 cm 23 5/8"x23 5/8"x5/8"	100098317 L105000561	G-149	1 x Cj 40 x Pal	0,36 x Cj 14,40 x Pal	14,39 x Cj 575,48 x Pal
CALGARY CLASSICO BPT	Tabla 2 cm Slab 3/4"	100155518 L105002501	G-157	-	-	-
CALGARY CLASSICO BPT	Tabla 3 cm Slab 1 1/8"	100155519 L105002471	G-169	-	-	-
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100126838 L108023491	G-070	-	-	-
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100126858 L108024471	G-060	-	-	-

***NOTE:** Occasionally holes may appear after installation. These can easily be repaired using a tile grout. In addition, fossils may be found in the composition of this stone. These are usually circular and white.



Floor Coverings: Calgary Classico Bioprot 60x60x1,5 cm.
Wall Coverings: Sherpa Brown Home Bioprot 80x80x1,5 cm.



ORIGIN: ASIA

VARIATIONS IN SHADE



Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCT

- | | |
|---------------|---|
| Indoor Floors | Outdoor Floors |
| Indoor Walls | Outdoor Walls |
| Shower Walls | Shower Floors |
| Worktops | Swimming-Pool Surrounds |
| Light Traffic | Medium Traffic |
| High Traffic | Ramp Test Rating (DIN 51130): R9 |

A-CERO GLOSS CLASSICO Bioprot

Board recommends Butech: colorstuk rapid blanco



	DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
	A-CERO GLOSS CLASSICO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100098316 L108016151	G-155	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	12,15 x Cj 948 x Pal
	PELDAÑO ML (CANTO RECTO)	MLx35x3 cm	100126835	G-070	-	-	-
	STEP ML (EASED EDGE)	MLx13 3/4"x1 1/8"	L108023471		-	-	-
	TABICA ML	MLx15x2 cm	100126855	G-060	-	-	-
	RISER ML	MLx5 7/8"x3/4"	L108024461		-	-	-

*NOTE: Occasionally holes may appear after installation. These can easily be repaired using a tile grout. In addition, fossils may be found in the composition of this stone. These are usually circular and white.



Floor Coverings: A-cero Dark Classico Bioprot 40x80x1,5 cm.

Wall Coverings: A-cero Dark Classico Bioprot 40x80x1,5 cm, A-cero Gloss Classico Bioprot 40x80x1,5 cm.

Complementary products: Spirit Lavabo A-cero Dark Bioprot 145x42x12 cm, Spirit Mueble Roble Ceniza 180x20x40 cm, Spirit Espejo Lagoa 226,7x97 cm.




SAHARA ANTICATO BLOprot

Board recommends Butech: colorstuk rapid bahama

ORIGIN: ASIA

VARIATIONS IN SHADE




USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R11

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
SAHARA ANTICATO BPT	Multiformato Multiformat	100107321 L105001821	G-155	1 x Cj 23 x Pal	0,72 x Cj 16,56 x Pal	24,18 x Cj 556,16 x Pal

*NOTE: We recommend the use of materials with a thickness of 2 cm in vehicle transit zones and in climates with a risk of frosts.

MULTIFORMAT



Instructions for laying
Packet is served. 0,74 m² per pack.
composed of 40,6x40,6x1,2 (2 pzs.).
20x20x1,2 (2 pzs.). 40,6x61x1,2 (1 pzs.).
20x40,6x1,2 (1 pzs.)




Floor Coverings: Sahara Anticato Multiformato Bioprot.



ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT


- | | |
|---------------|--|
| Indoor Floors | Outdoor Floors |
| Indoor Walls | Outdoor Walls |
| Shower Walls | Shower Floors |
| Worktops | Swimming-Pool Surrounds |
| Light Traffic | Medium Traffic |
| High Traffic | Ramp Test Rating (DIN 51130): R11 |

CREAM AGED ANTICATO BLOprot

Board recommends Butech: colorstuk rapid gris

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
CREAM AGED ANTICATO BPT	Multiformato Multiformat	100099768 L108016751	G-141	1 x Cj 38 x Pal	0,72 x Cj 27,36 x Pal	28,94 x Cj 1099,98 x Pal

MULTIFORMAT



Instructions for laying
Packet is served. 0,74 m² per pack.
composed of 40,6x40,6x1,5 (2 pzs.).
20x20x1,5 (2 pzs.). 40,6x61x1,5 (1 pzs.).
20x40,6x1,5 (1 pzs.)



Floor Coverings: Cream Aged Anticato Multiformato Bioprot.



VANCOUVER CLASSICO Bioprot

Board recommends Butech: colorstuk rapid gris

Bevel

ORIGIN: EUROPE

VARIATIONS IN SHADE




USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
VANCOUVER CLASSICO BPT	30x60x1,4 cm 11 3/4"x23 5/8"x1/2"	100146823 L108026641	G-157	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	19,05 x Cj 838,20 x Pal
VANCOUVER CLASSICO BPT	40x80x2 cm 15 3/4"x31 1/2"x5/8"	100146082 L105002311	G-168	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	16,24 x Cj 1267,11 x Pal
VANCOUVER CLASSICO BPT	Tabla 2 cm Slab 3/4"	100155575 L105002491	G-155	-	-	-
VANCOUVER CLASSICO BPT	Tabla 3 cm Slab 1 1/8"	100155576 L105002511	G-168	-	-	-
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100156712 L108030141	G-070	-	-	-
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100156709 L108030231	G-060	-	-	-



Floor Coverings: Quebec Classico Bioprot 40x80x2 cm.
Wall Coverings: Vancouver Classico Bioprot 40x80x2 cm, Quebec Classico Bioprot 40x80x2 cm.
Complementary products: Men{H}ir Crema Italia Classico Bioprot 42x42x14 cm, Men{H}ir Encimera L Roble Antracita 150x60x5 cm, Men{H}ir Estante L Roble Antracita 150x60x5 cm, Men{H}ir Espejo L Roble Antracita 150x60x5 cm, Men{H}ir Estante XS Roble Antracita 30x20x5 cm, Men{H}ir Modulo Roble Antracita 33x35,6x150 cm.

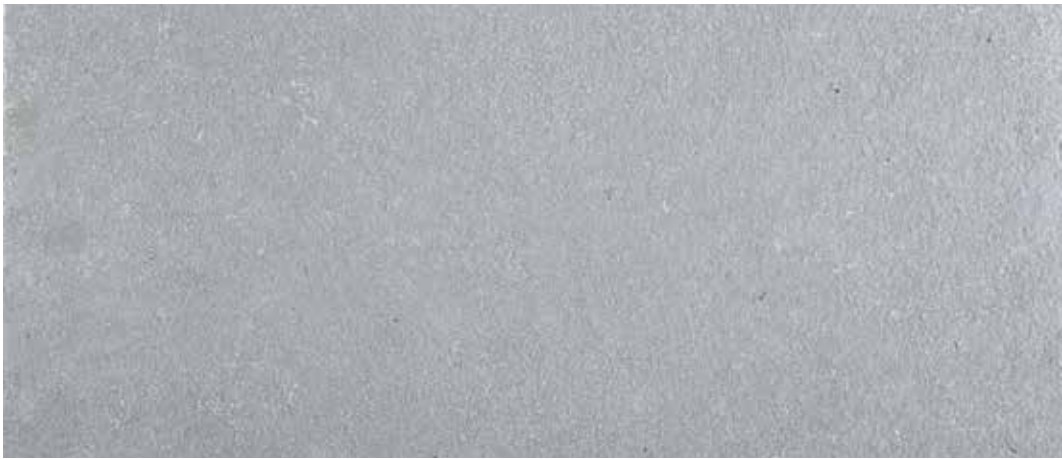


GREY AGED ANTICATO BPTprot

Board recommends Butech: colorstuk rapid gris

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
GREY AGED ANTICATO BPT	Multiformato Multiformato	100099769 L108016741	G-141	1 x Cj 38 x Pal	0,72 x Cj 27,36 x Pal	30,26 x Cj 1149,84 x Pal

ORIGIN: ASIA


VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R11

MULTIFORMATO



Instructions for laying
Packet is served. 0,74 m² per pack.
composed of 40,6x40,6x1,2 (2 pzs.).
20x20x1,2 (2 pzs.). 40,6x61x1,2 (1 pzs.).
20x40,6x1,2 (1 pzs.)



GREY AGED HOME BPTprot

Board recommends Butech: colorstuk rapid gris

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
GREY AGED HOME BPT	50x100x2 cm 19 5/8"x39 3/8"x3/4"	100139180 L107600881	G-171	1 x Cj 35 x Pal	0,50 x Cj 17,50 x Pal	25 x Cj 875 x Pal

*NOTE: Small white crystalline formations may appear due to the natural stone formation process.

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10




QUEBEC CLASSICO BiOprot
Board recommends Butech: *colorstuk rapid gris*

Bevel

ORIGIN: EUROPE

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
QUEBEC CLASSICO BPT	30x60x1,4 cm 11 3/4"x23 5/8"x1/2"	100146822 L108026631	G-166	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	25,05 x Cj 1102,20 x Pal
QUEBEC CLASSICO BPT	40x80x2 cm 15 3/4"x31 1/2"x5/8"	100146067 L105002321	G-171	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	16,13 x Cj 1257,98 x Pal
QUEBEC CLASSICO BPT	Tabla 2 cm Slab 3/4"	100155572 L105002461	G-157	-	-	-
QUEBEC CLASSICO BPT	Tabla 3 cm Slab 1 1/8"	100155573 L105002481	G-169	-	-	-
PELDAÑO ML (CANTO RECTO) STEP ML (EASED EDGE)	MLx35x3 cm MLx13 3/4"x1 1/8"	100156711 L108030151	G-070	-	-	-
TABICA ML RISER ML	MLx15x2 cm MLx5 7/8"x3/4"	100156708 L108030241	G-060	-	-	-

*NOTE: We recommend the use of the double gluing system when laying pieces using a fast-drying cement-glue Super One.



Floor Coverings: Quebec Classico Bioprot 40x80x2 cm.
Wall Coverings: Vancouver Classico Bioprot 40x80x2 cm, Quebec Classico Bioprot 40x80x2 cm.
Complementary products: Men(H)ir Crema Italia Classico Bioprot 42x42x14 cm, Men(H)ir Encimera L Roble Antracita 150x60x5 cm, Men(H)ir Espejo L Roble Antracita 150x60x5 cm, Men(H)ir Modulo Roble Antracita 33x35,6x150 cm.




BOSTWANA ANTICATO BIQprot

Board recommends Butech: colorstuk rapid antracita

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
BOSTWANA ANTICATO BPT	Multiformato Multiformato	100086511 L107000181	G-157	1 x Cj 38 x Pal	0,72 x Cj 27,36 x Pal	26,06 x Cj 990,32 x Pal

ORIGIN: ASIA


VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R11

MULTIFORMAT



Instructions for laying

Packet is served. 0,74 m² per pack.
composed of 40,6x40,6x1,2 (2 pzs.).
20x20x1,2 (2 pzs.). 40,6x61x1,2 (1 pzs.).
20x40,6x1,2 (1 pzs.)



BOSTWANA AGED HOME BIQprot

Board recommends Butech: colorstuk rapid antracita

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
BOSTWANA AGED HOME BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100103983 L112995561	G-142	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	15,48 x Cj 681,12 x Pal
BOSTWANA AGED HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100103984 L105001051	G-147	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	11,47 x Cj 894,35 x Pal

***NOTE:** We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.

ORIGIN: ASIA

VARIATIONS IN SHADE




USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors*
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10



ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT


Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R11

BURKHARA ANTICATO BiOprot

Board recommends Butech: colorstuk rapid gris / beige

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
BURKHARA ANTICATO BPT	Multiformato Multiformat	100086512 L108010501	G-157	1 x Cj 38 x Pal	0,72 x Cj 27,36 x Pal	25,82 x Cj 981,16 x Pal

MULTIFORMAT



Instructions for laying

Packet is served. 0,74 m² per pack.
composed of 40,6x40,6x1,2 (2 pzs.).
20x20x1,2 (2 pzs.). 40,6x61x1,2 (1 pzs.).
20x40,6x1,2 (1 pzs.)



Floor Coverings: Burkhard Anticato Multiformato BiOprot.



Board recommends Butech: colorstuk rapid antracita

MINI FAN BOSTWANA ANTICATO

65x47x2cm - 25 5/8"x18 1/2"x3/4"
100086237 - L105000221 - G-121



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic



Board recommends Butech: colorstuk rapid beige

MINI FAN BURKHARA ANTICATO

65x47x2cm - 25 5/8"x18 1/2"x3/4"
100086239 - L105000211 - G-121



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic



Board recommends Butech: colorstuk rapid antracita

MINI FAN BOSTWANA BURKHARA ANTICATO

65x47x2cm - 25 5/8"x18 1/2"x3/4"
100086238 - L105000181 - G-121



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic



Board recommends Butech: colorstuk rapid antracita

MINI BRICK BOSTWANA ANTICATO

60,5x40x2cm - 23 7/8"x15 3/4"x3/4"
100086235 - L105000191 - G-129



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic



Board recommends Butech: colorstuk rapid beige

MINI BRICK BURKHARA ANTICATO

60,5x40x2cm - 23 7/8"x15 3/4"x3/4"
100086236 - L105000231 - G-129



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic



Board recommends Butech: colorstuk rapid antracita

MINI BRICK BOSTWANA BURKHARA ANTICATO

60,5x40x2cm - 23 7/8"x15 3/4"x3/4"
100086234 - L105000201 - G-129



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
MINI BRICK BOSTWANA	60,5x40x2 cm 23 7/8"x15 3/4"x3/4"	100086235 L105000191	G-129	1 x Cj 54 x Pal	0,24 x Cj 13,07 x Pal	11,88 x Cj 641,63 x Pal
MINI BRICK BOSTWANA-BURKHARA	60,5x40x2 cm 23 7/8"x15 3/4"x3/4"	100086234 L105000201	G-129	1 x Cj 54 x Pal	0,24 x Cj 13,07 x Pal	11,88 x Cj 641,63 x Pal
MINI BRICK BURKHARA	60,5x40x2 cm 23 7/8"x15 3/4"x3/4"	100086236 L105000231	G-129	1 x Cj 54 x Pal	0,24 x Cj 13,07 x Pal	11,88 x Cj 641,63 x Pal
MINI FAN BOSTWANA	65x47x2 cm 25 5/8"x18 1/2"x3/4"	100086237 L105000221	G-121	1 x Cj 54 x Pal	0,19 x Cj 10,26 x Pal	9,26 x Cj 500 x Pal
MINI FAN BOSTWANA-BURKHARA	65x47x2 cm 25 5/8"x18 1/2"x3/4"	100086238 L105000181	G-121	1 x Cj 54 x Pal	0,19 x Cj 10,26 x Pal	9,26 x Cj 500 x Pal
MINI FAN BURKHARA	65x47x2 cm 25 5/8"x18 1/2"x3/4"	100086239 L105000211	G-121	1 x Cj 54 x Pal	0,19 x Cj 10,26 x Pal	9,26 x Cj 500 x Pal





SANDSTONES

DESERT SANDSTONE

Floor Coverings: Desert Sandstone Classico Bioprot.
Wall Coverings: Desert Sandstone Classico Bioprot.



ORIGIN: ASIA

VARIATIONS IN SHADE

Uniform
 Slight
 Moderate
 Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10

DESERT SANDSTONE CLASSICO Bioprot

Board recommends Butech: *colorstuk rapid gris*



	DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
	DESERT SANDSTONE CLASSICO BPT	40x80x2 cm 15 3/4"x31 1/2"x3/4"	100120889 L107500471	G-155	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	15,87 x Cj 1238 x Pal
	DESERT SANDSTONE CLASSICO BPT	Tabla 2 cm Slab 3/4"	100155570 L107500531	G-138	-	-	-
	DESERT SANDSTONE CLASSICO BPT	Tabla 3 cm Slab 1 1/8"	100155571 L107500541	G-140	-	-	-
	PELDAÑO ML (CANTO RECTO)	MLx35x3 cm	100156695	G-070	-	-	-
	STEP ML (EASED EDGE)	MLx13 3/4"x1 1/8"	L107500561	-	-	-	-
	TABICA ML	MLx15x2 cm	100156724	G-060	-	-	-
	RISER ML	MLx5 7/8"x3/4"	L107500551	-	-	-	-

***NOTE:** Occasionally holes may appear after installation, you can easily repaired with grout. Placement is recommended with quick-setting cement glue Super One.



Floor Coverings: Desert Sandstone Classico Bioprot 40x80x2 cm.
Wall Coverings: Desert Sandstone Classico Bioprot 40x80x2 cm.



Floor Coverings: Desert Sandstone Classico Bioprot 40x80x2 cm.
Wall Coverings: Bhutan Natural Bioprot 40x80x2 cm.





SLATES

BHUTAN

PATAGONIA

TUKUMAN

PAMPA

NEPAL

BOMBAY

DELHI

FIDJI

KATHMANDU

Floor Coverings: Kathmandu Pulido Bioprot 40x80x1,5 cm.

Wall Coverings: Kathmandu Natural Home Bioprot 40x80x1,5 cm, Wood Feel (6) 30x30x1 cm.

Complementary products: Trend Blanco Athenas Bioprot 68x39x13 cm, Future Blanco Athenas Bioprot 216x86x54 cm.



ORIGIN: EUROPE

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10

BHUTAN NATURAL Bioproto

Board recommends Butech: colorstuk rapid antracita

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
BHUTAN NATURAL BPT	30x60x1,2 cm 11 3/4"x23 5/8"x3/8"	100069634 L112995111	G-142	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	23,76 x Cj 1045,44 x Pal
BHUTAN NATURAL BPT	40x80x2 cm 15 3/4"x31 1/2"x3/4"	100081435 L106200181	G-173	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	19,23 x Cj 1499,94 x Pal

***NOTE:** Slate is an exfoliative rock. This means it is made up of different layers, one on top of the other, which may eventually flake off; however, this does not affect product quality. Given the relief of slate, make sure that pieces are blemished as little as possible when grouting joints so as to make cleaning them afterwards easier and to prevent grout from getting lodged in the crevices.
This is usually found with metal incrustations that are inherent to the slate.
The thicknesses of the pieces are always approximate due to the characteristics of the stone.



Floor Coverings: Bhutan Natural Bioproto 40x80x2 cm.
Wall Coverings: Bhutan Natural Bioproto 40x80x2 cm, Wood Even (1,9) 28x28x1 cm.



ORIGIN: AMERICA

VARIATIONS IN SHADE



Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCT

- | | |
|---------------|---|
| Indoor Floors | Outdoor Floors* |
| Indoor Walls | Outdoor Walls |
| Shower Walls | Shower Floors |
| Worktops | Swimming-Pool Surrounds |
| Light Traffic | Medium Traffic |
| High Traffic | Ramp Test Rating (DIN 51130): R9 |

PATAGONIA HOME BiOprot

Board recommends Butech: *colorstuk rapid antracita / negro*

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
PATAGONIA HOME BPT	30x60x1 cm 11 3/4"x23 5/8"x3/8"	100000176 L112952031	G-140	4 x Cj 176 x Pal	0,72 x Cj 31,66 x Pal	26,28 x Cj 1156,32 x Pal
PATAGONIA HOME BPT	60x60x1 cm 23 5/8"x23 5/8"x3/8"	100007870 L116648011	G-150	2 x Cj 92 x Pal	0,72 x Cj 33,12 x Pal	20,95 x Cj 963,61 x Pal
PATAGONIA HOME BPT	160x60x2 cm 63"x23 5/8"x3/4"	100001538 L150301031	G-171	1 x Cj 21 x Pal	0,96 x Cj 20,19 x Pal	56,30 x Cj 1182,30 x Pal

***NOTE:** We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.
The thicknesses of the boards are always approximate due to the characteristics of the stone.



Wall Coverings: Patagonia Home Bioprot 30x60x1 cm, Globe Stick Nepal 10x40x2/2,5 cm.




TUKUMAN HOME BiOprot

Board recommends Butech: colorstuk rapid moka

ORIGIN: AMERICA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors*
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
TUKUMAN HOME BPT	30x60x1 cm 11 3/4"x23 5/8"x3/8"	100000177 L112952041	G-140	4 x Cj 176 x Pal	0,72 x Cj 31,66 x Pal	25,90 x Cj 1139,60 x Pal
TUKUMAN HOME BPT	60x60x1 cm 23 5/8"x23 5/8"x3/8"	100007871 L116648021	G-150	2 x Cj 92 x Pal	0,72 x Cj 33,12 x Pal	21,43 x Cj 985,96 x Pal
TUKUMAN HOME BPT	160x60x2 cm 63"x23 5/8"x3/4"	100001539 L150301041	G-171	1 x Cj 21 x Pal	0,96 x Cj 20,19 x Pal	55,89 x Cj 1173,69 x Pal

***NOTE:** We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.
The thicknesses of the boards are always approximate due to the characteristics of the stone.



Floor Coverings: Tukuman Home BiOprot 30x60x1 cm.
Wall Coverings: Tukuman Home BiOprot 30x60x1 cm, Paradise Round Stone Negro 31,5x31,5x1 cm.



ORIGIN: AMERICA

VARIATIONS IN SHADE



Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCT

- | | |
|---------------|---|
| Indoor Floors | Outdoor Floors* |
| Indoor Walls | Outdoor Walls |
| Shower Walls | Shower Floors |
| Worktops | Swimming-Pool Surrounds |
| Light Traffic | Medium Traffic |
| High Traffic | Ramp Test Rating (DIN 51130): R9 |

PAMPA HOME BiOprot

Board recommends Butech: colorstuk rapid cemento

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
PAMPA HOME BPT	30x60x1 cm 11 3/4"x23 5/8"x3/8"	100000175 L112952021	G-140	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	26,28 x Cj 1156,32 x Pal
PAMPA HOME BPT	60x60x1 cm 23 5/8"x23 5/8"x3/8"	100007869 L116648001	G-150	2 x Cj 92 x Pal	0,72 x Cj 33,12 x Pal	20,95 x Cj 963,61 x Pal
PAMPA HOME BPT	160x60x2 cm 63"x23 5/8"x3/4"	100001537 L150301021	G-171	1 x Cj 21 x Pal	0,96 x Cj 20,19 x Pal	56,30 x Cj 1182,30 x Pal

*NOTE: We do not recommend the use of this material in standard finishes L'ANTIC COLONIAL for external paving. Productions can be made suitable for exterior finish as special order.
The thicknesses of the boards are always approximate due to the characteristics of the stone.




Wall Coverings: Pampa Home Bioprot 30x60x1 cm, Globe Stick Nepal 10x40x2/2,5 cm.



ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls*
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R12

NEPAL NATURAL BiOprot

Board recommends Butech: *colorstuk rapid cemento*

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
NEPAL NATURAL BPT	30x60x1,2-1,4 cm 11 3/4"x23 5/8"x1/2"	100069167 L112995101	G-139	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	19,71 x Cj 27,61 x Pal
NEPAL NATURAL BPT	60x90x1,4-1,8 cm 23 5/8"x35 3/8"x5/8"-3/4"	100081419 L151501511	G-153	1 x Cj 46 x Pal	0,54 x Cj 24,84 x Pal	867,24 x Cj 1269,88 x Pal

***NOTE:** The thicknesses of the pieces are always approximate due to the characteristics of the stone.
This slate may contain traces of metal which could rust.



Floor Coverings: Nepal Natural Bioprot 60x90x1,5 cm.
Wall Coverings: Outlines Ministrip Nepal 29,9x22,7x1 cm.
Complementary products: Buddha Brown Stone Classico Bioprot 47x85 cm.



ORIGIN: **ASIA**

VARIATIONS IN SHADE

Uniform

Slight

Moderate

Pronounced

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors

Indoor Walls

Shower Walls

Worktops

Light Traffic

High Traffic

Outdoor Floors

Outdoor Walls

Shower Floors

Swimming-Pool Surrounds

Medium Traffic

Ramp Test Rating (DIN 51130): **R10**

BOMBAY NATURAL HOME BIOprot

Board recommends Butech: *colorstuk rapid caramelo*

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
BOMBAY NATURAL HOME BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100065522 L108005901	G-140	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	20,25 x Cj 891 x Pal
BOMBAY NATURAL HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100078649 L106200141	G-171	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	14,10 x Cj 1100 x Pal

*NOTE: The thicknesses of the pieces are always approximate due to the characteristics of the stone.



ORIGIN: **ASIA**

VARIATIONS IN SHADE

Uniform

Slight

Moderate

Pronounced

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors

Indoor Walls

Shower Walls

Worktops

Light Traffic

High Traffic

Outdoor Floors

Outdoor Walls

Shower Floors

Swimming-Pool Surrounds

Medium Traffic

Ramp Test Rating (DIN 51130): **R9**

BOMBAY PULIDO BIOprot

Board recommends Butech: *colorstuk rapid caramelo*

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
BOMBAY PULIDO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100065786 L106400011	G-140	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	26,81 x Cj 1179,55 x Pal
BOMBAY PULIDO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100080210 L106200151	G-171	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,46 x Cj 1050 x Pal

*NOTE: The thicknesses of the pieces are always approximate due to the characteristics of the stone.
The polished slate when used as paving, is recommended only for domestic areas of low traffic.

**DELHI NATURAL HOME** BIOprotBoard recommends Butech: *colorstuk rapid cemento*ORIGIN: **ASIA****VARIATIONS IN SHADE**

Uniform



Slight



Moderate



Pronounced

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
DELHI NATURAL HOME BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100065523 L108005911	G-140	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	20,25 x Cj 891 x Pal
DELHI NATURAL HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100078650 L106200131	G-171	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	14,10 x Cj 1100 x Pal

*NOTE: The thicknesses of the pieces are always approximate due to the characteristics of the stone.

**DELHI PULIDO** BIOprotBoard recommends Butech: *colorstuk rapid cemento*ORIGIN: **ASIA****VARIATIONS IN SHADE**

Uniform



Slight



Moderate



Pronounced

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
DELHI PULIDO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100082874 L106400021	G-147	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	28,19 x Cj 1240,45 x Pal
DELHI PULIDO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100080212 L106200161	G-171	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	14,10 x Cj 1100 x Pal

*NOTE: The thicknesses of the pieces are always approximate due to the characteristics of the stone.
The polished slate when used as paving, is recommended only for domestic areas of low traffic.



ORIGIN: ASIA

VARIATIONS IN SHADE



Uniform



Slight



Moderate



Pronounced

USE RECOMMENDATIONS BY PRODUCT

- | | |
|---------------|--|
| Indoor Floors | Outdoor Floors |
| Indoor Walls | Outdoor Walls |
| Shower Walls | Shower Floors |
| Worktops | Swimming-Pool Surrounds |
| Light Traffic | Medium Traffic |
| High Traffic | Ramp Test Rating (DIN 51130): R10 |

FIDJI NATURAL HOME BiOprot

Board recommends Butech: *colorstuk rapid cemento / antracita*

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
FIDJI NATURAL HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100099457 L107500421	G-163	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	14,10 x Cj 1100 x Pal

***NOTE:** The thicknesses of the pieces are always approximate due to the characteristics of the stone.
This slate may contain traces of metal which could rust.



Floor Coverings: Fidji Natural Home BiOprot 40x80x1,5 cm.

Complementary products: Round Blanco Athenas BiOprot 42x10 cm, Wood Nogal Warm 160x50x10 cm, Hampton Nogal Warm 160x44x40cm, Khoa Blanco Athenas BiOprot 185x90x54 cm.

**KATHMANDU NATURAL HOME** BI0protBoard recommends Butech: *colorstuk rapid gris*ORIGIN: **ASIA****VARIATIONS IN SHADE****USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
KATHMANDU NATURAL HOME BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100090983 L107000321	G-147	3 x Cj 132 x Pal	0,54 x Cj 23,76 x Pal	21,78 x Cj 958,45 x Pal
KATHMANDU NATURAL HOME BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100086259 L107000161	G-161	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	14,62 x Cj 1140 x Pal

NOTE:** The thicknesses of the pieces are always approximate due to the characteristics of the stone.**KATHMANDU PULIDO** BI0protBoard recommends Butech: *colorstuk rapid manhattan*ORIGIN: **ASIA*VARIATIONS IN SHADE****USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
KATHMANDU PULIDO BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100090984 L107000331	G-147	4 x Cj 176 x Pal	0,72 x Cj 31,68 x Pal	24,70 x Cj 1086,62 x Pal
KATHMANDU PULIDO BPT	40x80x1,5 cm 15 3/4"x31 1/2"x5/8"	100086260 L107000131	G-161	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,93 x Cj 1086,70 x Pal

***NOTE:** The thicknesses of the pieces are always approximate due to the characteristics of the stone.
The polished slate when used as paving, is recommended only for domestic areas of low traffic.



Floor Coverings: Kathmandu Pulido Bioprot 40x80x1,5 cm.

Wall Coverings: Kathmandu Natural Home Bioprot 40x80x1,5 cm, Wood Feel (6) 30x30x1 cm.

Complementary products: Trend Blanco Athenas Bioprot 68x39x13 cm, Future Blanco Athenas Bioprot 216x86x54 cm.





EMOTIONS

CALGARY GROOVE
CALGARY WIND
CALGARY CHANNEL
HIGHLAND BLANCO
SANDSTONE WAVE
SANDSTONE VALLEY
SPIRIT CURVAS

Wall Coverings: Sandstone Wave Bioprot 30x30x2 cm.

**EMOTIONS CALGARY GROOVE**

No supported grouting

Limestone

ORIGIN: **ASIA****VARIATIONS IN SHADE**

Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCTIndoor
FloorsOutdoor
FloorsIndoor
WallsOutdoor
WallsShower
WallsShower
Floors

Worktops

Swimming-Pool
Surrounds

Light Traffic

Medium
TrafficHigh
TrafficRamp Test Rating
(DIN 51130): **NA**

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
EMOTIONS CALGARY GROOVE	30x60x3 cm 11 3/4"x23 5/8"x1 1/8"	100103985 L112995571	G-129	1 x Cj 44 x Pal	0,18 x Cj 7,92 x Pal	13,04 x Cj 573,80 x Pal
EMOTIONS CALGARY GROOVE	40x80x3 cm 15 3/4"x31 1/2"x1 1/8"	100103986 L105001061	G-137	1 x Cj 39 x Pal	0,32 x Cj 12,48 x Pal	19,23 x Cj 749,97 x Pal

**EMOTIONS CALGARY WIND**

No supported grouting

Limestone

ORIGIN: **ASIA****VARIATIONS IN SHADE**

Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCTIndoor
FloorsOutdoor
FloorsIndoor
WallsOutdoor
WallsShower
WallsShower
Floors

Worktops

Swimming-Pool
Surrounds

Light Traffic

Medium
TrafficHigh
TrafficRamp Test Rating
(DIN 51130): **NA**

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
EMOTIONS CALGARY WIND	30x60x2 cm 11 3/4"x23 5/8"x1 1/8"	100103987 L112995581	G-148	2 x Cj 88 x Pal	0,36 x Cj 15,84 x Pal	14,80 x Cj 651,20 x Pal
EMOTIONS CALGARY WIND	40x80x2 cm 15 3/4"x31 1/2"x1 1/8"	100103988 L105001071	G-165	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	14,10 x Cj 1100,03 x Pal



EMOTIONS CALGARY CHANNEL

No supported grouting
Limestone

ORIGIN: ASIA

VARIATIONS IN SHADE

Uniform

Slight

Moderate

Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors

Indoor Walls

Shower Walls

Worktops

Light Traffic

High Traffic

Outdoor Floors

Outdoor Walls

Shower Floors

Swimming-Pool Surrounds

Medium Traffic

Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
EMOTIONS CALGARY CHANNEL	40x80x2 cm 15 3/4"x31 1/2"x3/4"	100113742 L105001811	G-171	1 x Cj 78 x Pal	0,32 x Cj 24,96 x Pal	13,04 x Cj 1017,20 x Pal



EMOTIONS HIGHLAND BLANCO

Board recommends Butech: colorstuk rapid manhattan
Marble

ORIGIN: ASIA

VARIATIONS IN SHADE

Uniform

Slight

Moderate

Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors

Indoor Walls

Shower Walls

Worktops

Light Traffic

High Traffic

Outdoor Floors

Outdoor Walls

Shower Floors

Swimming-Pool Surrounds

Medium Traffic

Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
EMOTIONS HIGHLAND BLANCO	15x60x1,4 cm 5 7/8"x23 5/8"x1/2"	100124710 L118994271	G-121	5 x Cj 150 x Pal	0,45 x Cj 27 x Pal	20,70 x Cj 1200,42 x Pal



EMOTIONS SANDSTONE WAVE


No supported grouting
Sandstone

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
EMOTIONS SANDSTONE WAVE	30x30x2 cm 11 3/4"x11 3/4"x3/4"	100081217 L107500271	G-164	5 x Cj 180 x Pal	0,45 x Cj 16,20 x Pal	18,51 x Cj 666,36 x Pal

*NOTE: Placement is recommended with quick-setting cement glue Super One.

ORIGIN: **ASIA**

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA




EMOTIONS SANDSTONE VALLEY

No supported grouting
Sandstone

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
EMOTIONS SANDSTONE VALLEY	30x30x2,3 cm 11 3/4"x11 3/4"x7/8"	100146028 L107500501	G-164	5 x Cj 180 x Pal	0,45 x Cj 16,20 x Pal	22,60 x Cj 778 x Pal

ORIGIN: **ASIA**

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA



ORIGIN: EUROPE

VARIATIONS IN SHADE



Uniform



*Slight



Moderate



*Pronounced

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors

Outdoor Floors

Indoor Walls

Outdoor Walls

Shower Walls

Shower Floors

Worktops

Swimming-Pool Surrounds

Light Traffic

Medium Traffic

High Traffic

Ramp Test Rating (DIN 51130): NA

*Las **VARIACIONES** de **DESTONIFICACIÓN** será ligera en el caso del A-cero Gloss y fuerte en el caso del A-cero Dark.


SPIRIT CURVAS BiOprot

No supported grouting

Natural stone cladding. A stroke transformed into a mural where lines and the relief are the main features.

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
SPIRIT CURVAS A-CERO DARK BPT	320x400x2-4 cm	100098341	G-083	1 x Cj	12,80 x Cj	1037,73 x Cj
	126"x157 4/8"x3/4"-1 5/8"	L108016171		1 x Pal	12,80 x Pal	1037,73 x x Pal
SPIRIT CURVAS A-CERO GLOSS BPT*	320x400x2-4 cm	100098343	G-080	1 x Cj	12,80 x Cj	765 x Cj
	126"x157 4/8"x3/4"-1 5/8"	L105000571		1 x Pal	12,80 x Pal	765 x Pal

*NOTE: Occasionally holes may appear after installation. These can easily be repaired using a tile grout. In addition, fossils may be found in the composition of this stone. These are usually circular and white. The Spirit Curvas cladding is not compatible with the A-cero Dark and A-cero Gloss bases.



Floor Coverings: A-cero Dark Bioprot 40x80x1,5 cm.

Wall Coverings: Spirit Curvas A-cero Gloss.

Complementary products: Lavabo Spirit A-cero Gloss 145x42x12 cm, Mueble Spirit Roble Intenso 180x20x40 cm, Espejo Spirit Neboa 246,3x130,5 cm.






LUXURY

NEREA
AGATA
AGORA
SAVAGE
EBONY

Floor Coverings: AC4 Vintage 1L Berlin 24,3x217,4x0,8 cm.
Wall Coverings: Luxury Calgary Agata Bioprot 30x60x1,2 cm,
Calgary Classico Bioprot 30x60x1,2 cm.
Complementary products: Men(H)ir Crema Italia Classico
Bioprot 42x42x14 cm, Men(H)ir Mueble S 3C Antracita Athenas
94x56,6x71 cm, Men(H)ir Espejo S Antracita 60x90x5 cm,
Men(H)ir Bañera Crema Italia Antracita Bioprot 185x90x54 cm

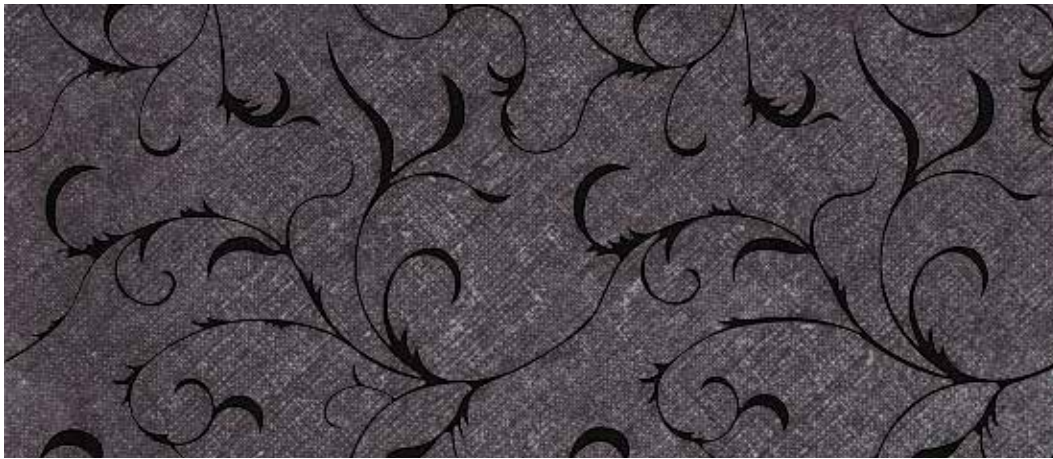**LUXURY BLACK NEREA** BIOprot⁺Board recommends Butech: *colorstuk rapid antracita*

Marble

ORIGIN: **ASIA****VARIATIONS IN SHADE**

Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCTIndoor
FloorsOutdoor
FloorsIndoor
WallsOutdoor
WallsShower
WallsShower
Floors

Worktops

Swimming-Pool
Surrounds

Light Traffic

Medium
TrafficHigh
TrafficRamp Test Rating
(DIN 51130): **NA**

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY BLACK NEREA BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100156499 L108030071	G-551	3 x Cj 120 x Pal	0,36 x Cj 14,40 x Pal	8,80 x Cj 352 x Pal

**LUXURY BLACK NEREA GOLD** BIOprot⁺Board recommends Butech: *colorstuk rapid negro*

Glazed Marble

ORIGIN: **ASIA****VARIATIONS IN SHADE**

Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCTIndoor
FloorsOutdoor
FloorsIndoor
WallsOutdoor
WallsShower
WallsShower
Floors

Worktops

Swimming-Pool
Surrounds

Light Traffic

Medium
TrafficHigh
TrafficRamp Test Rating
(DIN 51130): **NA**

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY BLACK NEREA GOLD BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100156540 L108030111	G-553	3 x Cj 120 x Pal	0,36 x Cj 14,40 x Pal	8,80 x Cj 352 x Pal



LUXURY CALGARY NEREA BPT

Board recommends Butech: colorstuk rapid beige
Limestone

ORIGIN: ASIA

VARIATIONS IN SHADE

Uniform

Slight

Moderate

Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors

Indoor Walls

Shower Walls

Worktops

Light Traffic

High Traffic

Outdoor Floors

Outdoor Walls

Shower Floors

Swimming-Pool Surrounds

Medium Traffic

Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY CALGARY NEREA BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100156499 L108030071	G-551	3 x Cj 120 x Pal	0,36 x Cj 14,40 x Pal	8,80 x Cj 352 x Pal

*NOTE: Grey and yellow grain, uneven edges and shade variations.



LUXURY CALGARY NEREA GOLD BPT

Board recommends Butech: colorstuk rapid bahama
Limestone Glazed

ORIGIN: ASIA

VARIATIONS IN SHADE

Uniform

Slight

Moderate

Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors

Indoor Walls

Shower Walls

Worktops

Light Traffic

High Traffic

Outdoor Floors

Outdoor Walls

Shower Floors

Swimming-Pool Surrounds

Medium Traffic

Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY CALGARY NEREA GOLD BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100156302 L108030011	G-554	3 x Cj 120 x Pal	0,54 x Cj 21,60 x Pal	18,66 x Cj 746,40 x Pal




LUXURY BLACK AGATA B10prot

Board recommends Butech: colorstuk rapid antracita
Marble

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY BLACK AGATA BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100156207 L112995751	G-551	3 x Cj 120 x Pal	0,54 x Cj 21,60 x Pal	18,66 x Cj 746,40 x Pal

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA



LUXURY CALGARY AGATA B10prot

Board recommends Butech: colorstuk rapid beige
Limestone

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY CALGARY AGATA BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100156300 L108030001	G-551	3 x Cj 120 x Pal	0,54 x Cj 21,60 x Pal	18,66 x Cj 746,40 x Pal

*NOTE: Grey and yellow grain, uneven edges and shade variations.

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA




LUXURY BLACK AGORA BIQprot

Board recommends Butech: *colorstuk rapid antracita*
Marble

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY BLACK AGORA BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100156208 L112995741	G-551	3 x Cj 120 x Pal	0,54 x Cj 21,60 x Pal	18,66 x Cj 746,40 x Pal



LUXURY CALGARY AGORA BIQprot

Board recommends Butech: *colorstuk rapid beige*
Limestone

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY CALGARY AGORA BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100156301 L108030021	G-552	3 x Cj 120 x Pal	0,54 x Cj 21,60 x Pal	18,66 x Cj 746,40 x Pal

*NOTE: Grey and yellow grain, uneven edges and shade variations.



LUXURY BLACK SAVAGE BPT

Board recommends Butech: colorstuk rapid antracita
Marble

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY BLACK SAVAGE BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100156209 L112995731	G-551	3 x Cj 120 x Pal	0,54 x Cj 21,60 x Pal	18,66 x Cj 746,40 x Pal

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA



LUXURY BLACK SAVAGE GOLD BPT

Board recommends Butech: colorstuk rapid negro
Glazed Marble

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY BLACK SAVAGE GOLD BPT	45,7x45,7x1,2 cm 18"x18"x1/2"	100156541 L108030101	G-554	2 x Cj 100 x Pal	0,21 x Cj 10,44 x Pal	6,22 x Cj 311 x Pal

*NOTE: The use of suitable cutting tools in good condition is essential when cutting pieces to avoid damaging the decorative layer. L'Antic Colonial recommends the use of a diamond disc cutter for wet-cutting and hard materials.

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA


V	A
V	A

Instructions for laying
Tiles should be laid alternately



ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

LUXURY CALGARY SAVAGE BPT

Board recommends Butech: colorstuk rapid beige
Limestone

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY CALGARY SAVAGE BPT	30x60x1,2 cm 11 3/4"x23 5/8"x1/2"	100156303 L108030031	G-551	3 x Cj 120 x Pal	0,54 x Cj 21,60 x Pal	18,66 x Cj 746,40 x Pal

*NOTE: Grey and yellow grain, uneven edges and shade variations.



ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

LUXURY CALGARY SAVAGE GOLD BPT

Board recommends Butech: colorstuk rapid bahama
Limestone Glazed

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY CALGARY SAVAGE GOLD BPT	45,7x45,7x1,2 cm 18"x18"x1/2"	100156304 L108030041	G-554	2 x Cj 52 x Pal	0,42 x Cj 10,87 x Pal	12,57 x Cj 326,92 x Pal

*NOTE: The use of suitable cutting tools in good condition is essential when cutting pieces to avoid damaging the decorative layer. L'Antic Colonial recommends the use of a diamond disc cutter for wet-cutting and hard materials.

V	A
V	A

Instructions for laying
Tiles should be laid alternately



Wall Coverings: *Luxury Calgary Savage Gold 45,7x45,7x1,2 cm.*



LUXURY EBONY SILVER BLOprot


Board recommends Butech: colorstuk rapid cemento
Glazed Marble

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY EBONY SILVER BPT	45,7x45,7x1,2 cm 18"x18"x1/2"	100156533 L108030121	G-554	2 x Cj 100 x Pal	0,21 x Cj 10,44 x Pal	6,22 x Cj 311 x Pal

***NOTE:** The use of suitable cutting tools in good condition is essential when cutting pieces to avoid damaging the decorative layer. L'Antic Colonial recommends the use of a diamond disc cutter for wet-cutting and hard materials.

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA



LUXURY EBONY GOLD BLOprot

Board recommends Butech: colorstuk rapid beige
Glazed Marble

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
LUXURY EBONY GOLD BPT	45,7x45,7x1,2 cm 18"x18"x1/2"	100156543 L108030091	G-553	2 x Cj 100 x Pal	0,21 x Cj 10,44 x Pal	6,22 x Cj 311 x Pal

***NOTE:** The use of suitable cutting tools in good condition is essential when cutting pieces to avoid damaging the decorative layer. L'Antic Colonial recommends the use of a diamond disc cutter for wet-cutting and hard materials.

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA





GLOBE

*BRICK
STICK
CASTLE
WALL*

Floor Coverings: Habana Brown Classico Bioprot 30x60x1,2 cm.
Wall Coverings: Globe Brick Bhutan 10x40x2-2,5 cm.




No supported grouting

GLOBE BRICK NEPAL

10x40x1,5-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100001583 - L153201501 - G-161

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte



No supported grouting

GLOBE BRICK INDIRA

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100044752 - L153201581 - G-157

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Pronounced



No supported grouting

GLOBE BRICK DELHI

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100057247 - L106300011 - G-157

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte




No supported grouting

GLOBE CORNER BRICK NEPAL

10x38x2-2,5cm - 3 7/8"x15"x3/4"-1"
100032187 - L153201571 - G-182

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte



No supported grouting

GLOBE CORNER BRICK INDIRA

10x38x2-2,5cm - 3 7/8"x15"x3/4"-1"
100044753 - L153201591 - G-182

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Pronounced



No supported grouting

GLOBE CORNER BRICK DELHI

10x38x2-2,5cm - 3 7/8"x15"x3/4"-1"
100060208 - L153201641 - G-182

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
GLOBE BRICK NEPAL	10x40x1,5-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100001583 L153201501	G-161	10 x Cj 420 x Pal	0,40 x Cj 16,80 x Pal	26,19 x Cj 1099,98 x Pal
GLOBE CORNER BRICK NEPAL	10x38x2-2,5 cm 3 7/8"x15x3/4"-1"	100032187 L153201571	G-182	10 x Cj 420 x Pal	0,38 x Cj 15,96 x Pal	19,77 x Cj 830,34 x Pal
GLOBE BRICK INDIRA	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100044752 L153201581	G-157	12 x Cj 504 x Pal	0,48 x Cj 20,16 x Pal	18,50 x Cj 777,17 x Pal
GLOBE CORNER BRICK INDIRA	10x38x2-2,5 cm 3 7/8"x15x3/4"-1"	100044753 L153201591	G-182	12 x Cj 504 x Pal	0,45 x Cj 19,15 x Pal	28,76 x Cj 1208,09 x Pal
GLOBE BRICK DELHI	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100057247 L106300011	G-157	10 x Cj 420 x Pal	0,40 x Cj 16,80 x Pal	18,63 x Cj 782,46 x Pal
GLOBE CORNER BRICK DELHI	10x38x2-2,5 cm 3 7/8"x15x3/4"-1"	100060208 L153201641	G-182	10 x Cj 420 x Pal	0,38 x Cj 15,96 x Pal	24,43 x Cj 1026,06 x Pal

*NOTE: This slate may contain traces of metal which could rust.



No supported grouting

GLOBE BRICK BLANCO
ALMERIA

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100031998 - L153201541 - G-190



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



No supported grouting

GLOBE CORNER BRICK
BLANCO ALMERIA

10x38x2-2,5cm - 3 7/8"x15"x3/4"-1"
100032128 - L153201531 - G-191



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



No supported grouting

GLOBE BRICK BHUTAN

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100001585 - L153201521 - G-157



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



No supported grouting

GLOBE CORNER BRICK
BHUTAN

10x38x2-2,5cm - 3 7/8"x15"x3/4"-1"
100032184 - L153201551 - G-182



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



No supported grouting

GLOBE BRICK BOMBAY


10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100057262 - L106300021 - G-157



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



No supported grouting

GLOBE CORNER BRICK
BOMBAY


10x38x2-2,5cm - 3 7/8"x15"x3/4"-1"
100060209 - L153201651 - G-182



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
GLOBE BRICK BLANCO ALMERIA	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100031998 L153201541	G-190	10 x Cj 420 x Pal	0,40 x Cj 16,80 x Pal	17,85 x Cj 749,70 x Pal
GLOBE CORNER BRICK BCO. ALMERIA	10x38x2-2,5 cm 3 7/8"x15x3/4"-1"	100032128 L153201531	G-191	10 x Cj 420 x Pal	0,38 x Cj 15,96 x Pal	17,18 x Cj 721,56 x Pal
GLOBE BRICK BHUTAN	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100001585 L153201521	G-157	12 x Cj 504 x Pal	0,48 x Cj 20,16 x Pal	21,37 x Cj 897,62 x Pal
GLOBE CORNER BRICK BHUTAN	10x38x2-2,5 cm 3 7/8"x15x3/4"-1"	100032184 L153201551	G-182	12 x Cj 504 x Pal	0,45 x Cj 19,15 x Pal	18,02 x Cj 757,01 x Pal
GLOBE BRICK BOMBAY	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100057262 L106300021	G-157	10 x Cj 420 x Pal	0,40 x Cj 16,80 x Pal	16,60 x Cj 697,20 x Pal
GLOBE CORNER BRICK BOMBAY	10x38x2-2,5 cm 3 7/8"x15x3/4"-1"	100060209 L153201651	G-182	10 x Cj 420 x Pal	0,38 x Cj 15,96 x Pal	24,43 x Cj 1026,06 x Pal

*NOTE: This slate may contain traces of metal which could rust.



No supported grouting

GLOBE BRICK LHASA

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100001584 - L153201511 - G-161

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte



No supported grouting

GLOBE STICK NEPAL

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100001565 - L151701001 - G-157

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte




No supported grouting

GLOBE STICK BHUTAN

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100001566 - L151701021 - G-157

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte




No supported grouting

GLOBE CORNER BRICK LHASA

10x38x2-2,5cm - 3 7/8"x15"x3/4"-1"
100032196 - L153201561 - G-182

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte



No supported grouting

GLOBE CORNER STICK NEPAL

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100032191 - L153201601 - G-191

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte




No supported grouting

GLOBE CORNER STICK BHUTAN

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100032195 - L153201621 - G-191

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
GLOBE BRICK LHASA	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100001584 L153201511	G-161	10 x Cj 420 x Pal	0,40 x Cj 16,80 x Pal	24,32 x Cj 1021,44 x Pal
GLOBE CORNER BRICK LHASA	10x38x2-2,5 cm 3 7/8"x15x3/4"-1"	100032196 L153201561	G-182	10 x Cj 420 x Pal	0,38 x Cj 15,96 x Pal	19,77 x Cj 830,34 x Pal
GLOBE STICK NEPAL	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100001565 L151701001	G-157	12 x Cj 504 x Pal	0,48 x Cj 20,16 x Pal	20,38 x Cj 856,29 x Pal
GLOBE CORNER STICK NEPAL	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100032191 L153201601	G-191	12 x Cj 504 x Pal	0,48 x Cj 20,16 x Pal	21,21 x Cj 891,07 x Pal
GLOBE STICK BHUTAN	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100001566 L151701021	G-157	12 x Cj 504 x Pal	0,48 x Cj 20,16 x Pal	20,38 x Cj 856,29 x Pal
GLOBE CORNER STICK BHUTAN	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100032195 L153201621	G-191	12 x Cj 504 x Pal	0,48 x Cj 20,16 x Pal	21,21 x Cj 891,07 x Pal

*NOTE: This slate may contain traces of metal which could rust.



No supported grouting

GLOBE STICK MIX NEPAL BHUTAN

10x40x1,2-2,5cm - 3 7/8"x15 3/4"x1/2"-1"
100099458 - L106300241 - G-157



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



No supported grouting

GLOBE STICK MIX NEPAL SHANNAN

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100057245 - L106300001 - G-157



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



No supported grouting

GLOBE CASTLE BURMA

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100086086 - L106300111 - G-157



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



No supported grouting

GLOBE CORNER STICK MIX NEPAL BHUTAN


10x40x1,2-2,5cm - 3 7/8"x15 3/4"x1/2"-1"
100114595 - L108020671 - G-183



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



No supported grouting

GLOBE CORNER STICK MIX NEPAL SHANNAN

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100060207 - L153201631 - G-191



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



No supported grouting

GLOBE CASTLE CREAM

10x40x2-2,5cm - 3 7/8"x15 3/4"x3/4"-1"
100086087 - L106300121 - G-158



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
GLOBE STICK MIX NEPAL BHUTAN	10x40x1,2-2,5 cm 3 7/8"x15 3/4"x1/2"-1"	100099458 L106300241	G-157	8 x Cj 640 x Pal	0,32 x Cj 25,60 x Pal	11,92 x Cj 953,60 x Pal
GLOBE CORNER STICK MIX NEPAL BHUTAN	10x40x1,2-2,5 cm 3 7/8"x15 3/4"x1/2"-1"	100114595 L108020671	G-183	8 x Cj 640 x Pal	0,32 x Cj 25,60 x Pal	14,14 x Cj 1131,52 x Pal
GLOBE CORNER STICK MIX NEPAL/SHAN.	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100060207 L153201631	G-191	12 x Cj 504 x Pal	0,48 x Cj 20,16 x Pal	20,18 x Cj 847,73 x Pal
GLOBE STICK MIX NEPAL/SHANNAN	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100057245 L106300001	G-157	12 x Cj 504 x Pal	0,48 x Cj 20,16 x Pal	21,42 x Cj 899,64 x Pal
GLOBE CASTLE BURMA	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100086086 L106300111	G-158	10 x Cj 360 x Pal	0,40 x Cj 14,40 x Pal	21 x Cj 756 x Pal
GLOBE CASTLE CREAM	10x40x2-2,5 cm 3 7/8"x15 3/4"x3/4"-1"	100086087 L106300121	G-158	10 x Cj 360 x Pal	0,40 x Cj 14,40 x Pal	22 x Cj 792 x Pal

*NOTE: This slate may contain traces of metal which could rust.




No supported grouting

GLOBE CASTLE CREAM AGED

10x40x2-3cm - 3 7/8"x15 3/4"x3/4"-1 1/8"
100099453 - L106300231 - G-157

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte




No supported grouting

GLOBE WALL NEPAL

15x54,8x1,2-3,5cm - 5 7/8"x21 5/8"x1/2"-1 3/8"
100086108 - L119165211 - G-144

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Pronounced




No supported grouting

GLOBE WALL BHUTAN

15x54,8x1,2-2,5cm - 5 7/8"x21 5/8"x1/2"-1"
100086107 - L119165231 - G-144

**USE RECOMMENDATIONS BY PRODUCT**

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls*	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE

Uniform Slight Moderate Fuerte

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
GLOBE CASTLE CREAM AGED	10x40x2-3 cm 3 7/8"x15 3/4"x3/4"-1 1/8"	100099453 L106300231	G-157	10 x Cj 360 x Pal	0,40 x Cj 14,40 x Pal	22,98 x Cj 827,28 x Pal
GLOBE WALL NEPAL	15x54,8x1,2-3,5 cm 5 7/8"x21 5/8"x1/2"-1 3/8"	100086108 L119165211	G-144	6 x Cj 180 x Pal	0,49 x Cj 14,80 x Pal	20,68 x Cj 620,46 x Pal
GLOBE WALL BHUTAN	15x54,8x1,2-2,5 cm 5 7/8"x21 5/8"x1/2"-1"	100086107 L119165231	G-144	6 x Cj 180 x Pal	0,49 x Cj 14,80 x Pal	23,34 x Cj 700,20 x Pal

*NOTE: This slate may contain traces of metal which could rust.



No supported grouting

GLOBE WALL SHANNAN

15x54,8x1,2-2,5cm - 5 7/8"x21 5/8"x1/2"-1"
100086109 - L119165221 - G-144



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



Uniform Slight Moderate Fuerte



No supported grouting

GLOBE WALL BURMA

15x54,8x1,2-2,5cm - 5 7/8"x21 5/8"x1/2"-1"
100099459 - L107000621 - G-147



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



Uniform Slight Moderate Fuerte



No supported grouting

GLOBE WALL WHITE


15x54,8x1,2-2,5cm - 5 7/8"x21 5/8"x1/2"-1"
100096194 - L108014841 - G-155



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors	Worktops
Indoor Walls	Outdoor Walls	Swimming-Pool Surrounds
Shower Walls	Shower Floors	Pool / Spa
Bajo Transito	Medium Traffic	High Traffic

VARIATIONS IN SHADE



Uniform Slight Moderate Fuerte

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
Globe Wall Shannan	15x54,8x1,2-2,5 cm 21 5/8"x5 7/8"x1/2"-1"	100086109 L119165221	G-144	6 x Cj 180 x Pal	0,49 x Cj 14,80 x Pal	25,02 x Cj 750,60 x Pal
Globe Wall Burma	15x54,8x1,2-2,5 cm 21 5/8"x5 7/8"x1/2"-1"	100099459 L107000621	G-147	7 x Cj 210 x Pal	0,58 x Cj 17,26 x Pal	27,53 x Cj 825,93 x Pal
Globe Wall White	15x54,8x1,2-2,5 cm 21 5/8"x5 7/8"x1/2"-1"	100096194 L108014841	G-155	6 x Cj 180 x Pal	0,49 x Cj 20,16 x Pal	28,75 x Cj 862,50 x Pal





HERITAGE

BLANCO CALACATTA
STATUARIO ALTISSIMO
CAIRO
NUBIA
PORT MONACO
PORT CANNES
PARAIBA
ONIX IGUAZU
ONIX ETNIA
ONIX BOTAFOGO
GIALLO CONTE
ONIX LAGOA
ONIX IPANEMA
ONIX LAVA
ONIX ROSATO

Synonymous with **EXCLUSIVITY** in the world of interior design and high decoration. His treatment 100% **HANDMADE** from choosing to placement conveys a **PERSONAL** touch to projects hard to forget and, above all, **IMITAR**. Gracias to modern techniques of locating deposits, mining, transport, handling and processing are achieved sophisticated blocks and slabs of considerable size to work semi-precious stone not only in **JEWELRY** but also in the world of interior decorating **HIGH-END**, giving us all their properties, characteristics, mannerisms, quirks and nuances to create unique and sensory unrepeatable. No standardized measure therefore all start from a block work increasingly **DISTINCT** and different **POSSIBILITIES**. Some blocks may have made simulating continuous veining.

Wall Coverings: Port Cannes.



BLANCO CALACATTA PULIDO

Board recommends Butech: *colorstuk rapid gris*
Marble

Bevel

ORIGIN: **EUROPE**

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
BLANCO CALACATTA PULIDO	Tabla 2 cm Slab 3/4"	100156918 L108030431	G-820	-	-	-

***NOTE:** Polished materials with continuous exposure to sunlight may tarnish.
The price groups are an estimation of the amount per MT2 of the panel.



BLANCO CALACATTA HOME

Board recommends Butech: *colorstuk rapid gris*
Marble

ORIGIN: **EUROPE**

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): 10

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
BLANCO CALACATTA HOME	Tabla 1,2 cm Slab 1/2"	100146090 L108026481	G-827	-	-	-
BLANCO CALACATTA HOME	Tabla 2 cm Slab 3/4"	100146091 L108026471	G-823	-	-	-

***NOTE:** The price groups are an estimation of the amount per MT2 of the panel.



STATUARIO ALTISSIMO PULIDO


Board recommends Butech: *colorstuk rapid gris*
Marble

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
STATUARIO ALTISSIMO PULIDO	Tabla 1,2 cm Slab 1/2"	100146098 L108026391	G-828	-	-	-
STATUARIO ALTISSIMO PULIDO	Tabla 2 cm Slab 3/4"	100146099 L108026401	G-826	-	-	-

***NOTE:** Polished materials with continuous exposure to sunlight may tarnish.
The price groups are an estimation of the amount per MT2 of the panel.

ORIGIN: EUROPE

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9



CAIRO PULIDO

Board recommends Butech: *colorstuk rapid gris*
Marble

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
CAIRO PULIDO	Tabla 1,2 cm Slab 1/2"	100146094 L108026441	G-817	-	-	-
CAIRO PULIDO	Tabla 2 cm Slab 3/4"	100146095 L108026431	G-816	-	-	-

***NOTE:** Polished materials with continuous exposure to sunlight may tarnish.
The price groups are an estimation of the amount per MT2 of the panel.

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

**NUBIA PULIDO**Board recommends Butech: *colorstuk rapid gris*

Marble

ORIGIN: **ASIA****VARIATIONS IN SHADE**

Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R9

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
NUBIA PULIDO PULIDO	Tabla 1,2 cm Slab 1/2"	100146096 L108026421	G-819	-	-	-
NUBIA PULIDO PULIDO	Tabla 2 cm Slab 3/4"	100146097 L108026411	G-816	-	-	-

***NOTE:** Polished materials with continuous exposure to sunlight may tarnish.
The price groups are an estimation of the amount per MT2 of the panel.

**PORT MONACO**Board recommends Butech: *colorstuk rapid gris*

Marble

ORIGIN: **AFRICA****VARIATIONS IN SHADE**

Uniform



Slight



Moderate



Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
PORT MONACO	Tabla 2 cm Slab 3/4"	100157004 L108030441	G-822	-	-	-

***NOTE:** The price groups are an estimation of the amount per MT2 of the panel.




PORT CANNES

Board recommends Butech: *colorstuk rapid gris*
Marble

ORIGIN: ASIA

VARIATIONS IN SHADE




USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
PORT CANNES	Tabla 2 cm Slab 3/4"	100157003 L108030451	G-820	-	-	-

*NOTE: The price groups are an estimation of the amount per MT2 of the panel.

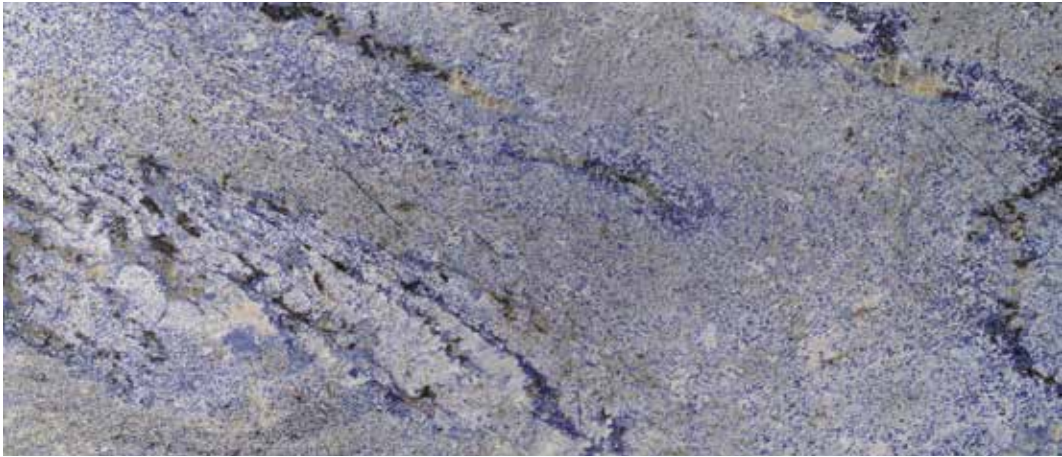

PARAIBA

Board recommends Butech: *colorstuk rapid gris*
Granite

ORIGIN: AMERICA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
PARAIBA	Tabla 2 cm Slab 3/4"	100157068 L108030551	G-850	-	-	-

*NOTE: The price groups are an estimation of the amount per MT2 of the panel.



ONIX IGUAZU

Board recommends Butech: *colorstuk rapid gris*
Granite

ORIGIN: **AMERICA**

VARIATIONS IN SHADE




USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
ONIX IGUAZU	Tabla 2 cm Slab 3/4"	100157065 L108030541	G-850	-	-	-

***NOTE:** The price groups are an estimation of the amount per MT2 of the panel.

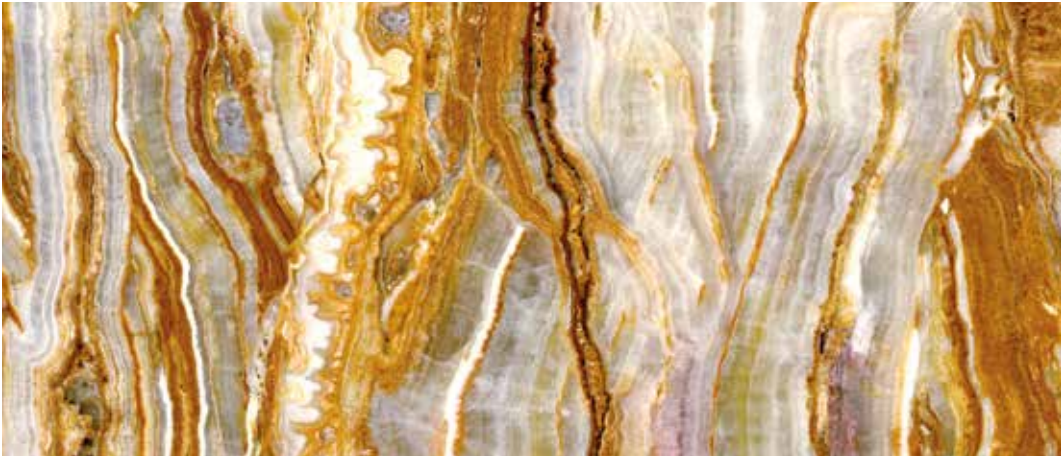

ONIX ETNIA

No supported grouting
Onix

ORIGIN: **ASIA**

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
ONIX ETNIA	Tabla 2 cm Slab 3/4"	100157064 L108030571	G-843	-	-	-

***NOTE:** The price groups are an estimation of the amount per MT2 of the panel.




ONIX BOTAFOGO

No supported grouting
Onix

ORIGIN: AMERICA

VARIATIONS IN SHADE




USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
ONIX BOTAFOGO	Tabla 2 cm Slab 3/4"	100157000 L108030421	G-843	-	-	-

*NOTE: The price groups are an estimation of the amount per MTZ of the panel.

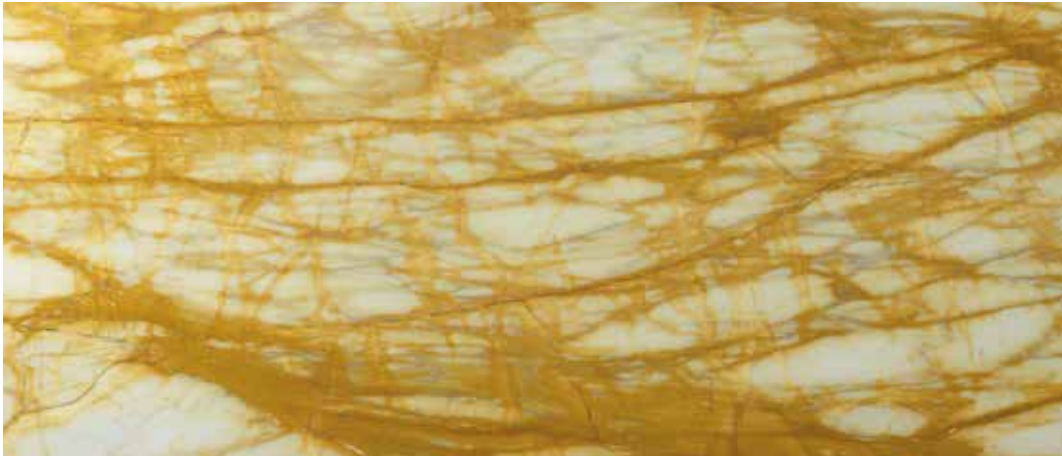

GIALLO CONTE

No supported grouting
Marble

ORIGIN: EUROPE

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
GIALLO CONTE	Tabla 2 cm Slab 3/4"	100156919 L108030461	G-825	-	-	-

*NOTE: The price groups are an estimation of the amount per MTZ of the panel.



ONIX LAGOA


No supported grouting
Onix

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
ONIX LAGOA	Tabla 2 cm Slab 3/4"	100157001 L108030471	G-840	-	-	-

*NOTE: The price groups are an estimation of the amount per MT2 of the panel.

ORIGIN: **ASIA**

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA



ONIX IPANEMA

No supported grouting
Onix

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
ONIX IPANEMA	Tabla 2 cm Slab 3/4"	100157066 L108030531	G-843	-	-	-

*NOTE: The price groups are an estimation of the amount per MT2 of the panel.


ORIGIN: **AMERICA**

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

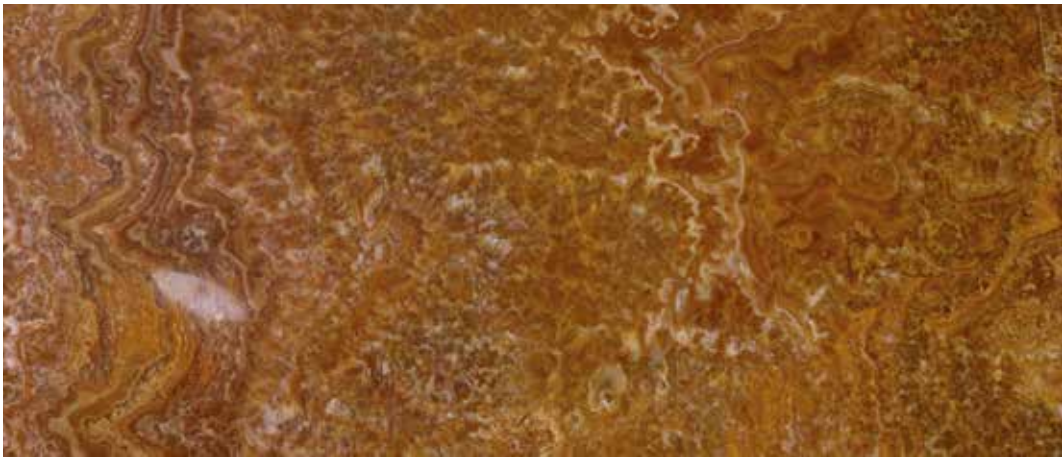


ONIX LAVA

No supported grouting
Onix

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
ONIX LAVA	Tabla 2 cm Slab 3/4"	100157067 L108030561	G-830	-	-	-

*NOTE: The price groups are an estimation of the amount per MT2 of the panel.



ONIX ROSATO

No supported grouting
Onix

ORIGIN: ASIA

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): NA

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
ONIX ROSATO	Tabla 2 cm Slab 3/4"	100157002 L108030481	G-850	-	-	-

*NOTE: The price groups are an estimation of the amount per MT2 of the panel.





DQS
design quartz stone


BLACK
WHITE
BLUE
RED
GREY

Wall Coverings: DQS White 60x60x1 cm.



ORIGIN: EUROPE

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10

DQS BLACK

Board recommends Butech: **colorstuk 0-4 negro + cl-stuk**

Mixture of natural quartz glass and resin bonded, which allows a material that is very resistant to scratching and acids.
Likewise it has a low absorption coefficient in liquid and high stain resistance.


DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
DQS BLACK	60x60x1 cm 23 5/8"x23 5/8"x3/8"	100096053 L107000471	G-182	3 x Cj 96 x Pal	1,08 x Cj 34,56 x Pal	27,56 x Cj 881,95 x Pal

***NOTE:** Material sensitive to changes in temperature and sunlight.
These should be laid using the two-component adhesive, SUPER-ONE, and the additive, UNILAX.
In the event of prolonged exposure to direct sunlight, POLITECH should be used.
Suitable for water heating systems.



ORIGIN: EUROPE

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10

DQS WHITE

Board recommends Butech: **colorstuk 0-4 blanco + cl-stuk**

Mixture of natural quartz glass and resin bonded, which allows a material that is very resistant to scratching and acids.
Likewise it has a low absorption coefficient in liquid and high stain resistance.

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
DQS WHITE	60x60x1 cm 23 5/8"x23 5/8"x3/8"	100096059 L107000531	G-182	3 x Cj 96 x Pal	1,08 x Cj 34,56 x Pal	27,56 x Cj 881,95 x Pal

***NOTE:** Material sensitive to changes in temperature and sunlight.
These should be laid using the two-component adhesive, SUPER-ONE, and the additive, UNILAX.
In the event of prolonged exposure to direct sunlight, POLITECH should be used.
Suitable for water heating systems.



ORIGIN: EUROPE

VARIATIONS IN SHADE

Uniform

Slight

Moderate

Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10

DQS BLUE

Board recommends Butech: colorstuk 0-4 cemento + cl-stuk

Mixture of natural quartz glass and resin bonded, which allows a material that is very resistant to scratching and acids. Likewise it has a low absorption coefficient in liquid and high stain resistance.

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
DQS BLUE	60x60x1 cm 23 5/8"x23 5/8"x3/8"	100096054 L107000481	G-182	3 x Cj 96 x Pal	1,08 x Cj 34,56 x Pal	27,56 x Cj 881,95 x Pal

*NOTE: Material sensitive to changes in temperature and sunlight. These should be laid using the two-component adhesive, SUPER-ONE, and the additive, UNILAX. In the event of prolonged exposure to direct sunlight, POLITECH should be used. Suitable for water heating systems.



ORIGIN: EUROPE

VARIATIONS IN SHADE

Uniform

Slight

Moderate

Fuerte

USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10


DQS RED

Board recommends Butech: colorstuk 0-4 cemento + cl-stuk

Mixture of natural quartz glass and resin bonded, which allows a material that is very resistant to scratching and acids. Likewise it has a low absorption coefficient in liquid and high stain resistance.

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
DQS RED	60x60x1 cm 23 5/8"x23 5/8"x3/8"	100096058 L107000521	G-182	3 x Cj 96 x Pal	1,08 x Cj 34,56 x Pal	27,56 x Cj 881,95 x Pal

*NOTE: Material sensitive to changes in temperature and sunlight. These should be laid using the two-component adhesive, SUPER-ONE, and the additive, UNILAX. In the event of prolonged exposure to direct sunlight, POLITECH should be used. Suitable for water heating systems.

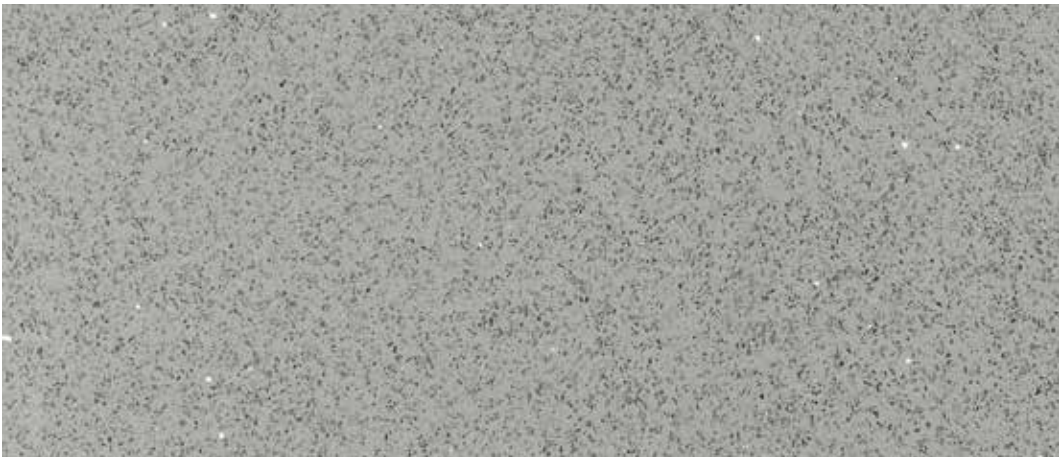

ORIGIN: EUROPE

VARIATIONS IN SHADE



USE RECOMMENDATIONS BY PRODUCT

Indoor Floors	Outdoor Floors
Indoor Walls	Outdoor Walls
Shower Walls	Shower Floors
Worktops	Swimming-Pool Surrounds
Light Traffic	Medium Traffic
High Traffic	Ramp Test Rating (DIN 51130): R10

DQS GREY

Board recommends Butech: **colorstuk 0-4 cemento + ci-stuk**

Mixture of natural quartz glass and resin bonded, which allows a material that is very resistant to scratching and acids. Likewise it has a low absorption coefficient in liquid and high stain resistance.

DESCRIPTION	FORMAT	CODES	GROUP	PZ	M2	KG
DQS GREY	60x60x1 cm 23 5/8" x 23 5/8" x 3/8"	100096055 L107000491	G-182	3 x Cj 96 x Pal	1,08 x Cj 34,56 x Pal	27,56 x Cj 881,95 x Pal

***NOTE:** Material sensitive to changes in temperature and sunlight. These should be laid using the two-component adhesive, SUPER-ONE, and the additive, UNILAX. In the event of prolonged exposure to direct sunlight, POLITECH should be used. Suitable for water heating systems.



Floor Coverings: DQS Grey 60x60x1 cm.



Floor Coverings: DQS Grey 60x60x1 cm.



Concentrated neutral detergent ideal for washing after laying the natural stone paving.

FILA CLEANER 1L

100093624 - L180300233 - G-920

Dilution 1:200
One litre covers 1500 m²/L



Descaler for removing grout residue and building-site dirt.

FILA DETERDEK 1L

100086918 - L180300226 - G-920

Dilution 1:5 - 1:10
One litre covers 20-35 m²/L



Cleaner, stain remover and wax stripper ideal for basic cleaning of acid-sensitive stone paving.

FILA PS87 1L

100097854 - L180300237 - G-930

Dilution 1:20
One litre covers 200 m²/L



Wax with matt finish for paving that makes cleaning and standard maintenance easier.

FILA MATT 1L

100086923 - L180300230 - G-930

Use without diluting
One litre covers 20 m²/L



Glossy-look self-polishing wax for paving that makes cleaning and standard maintenance easier.

FILA LONGLIFE 1L

100086922 - L180300229 - G-930

Use without diluting
One litre covers 30-40 m²/L



Water-based water-repellent protection that prevents efflorescence, ageing and decomposition of the product.

FILA HP98 1L

100086919 - L180300227 - G-930

Use without diluting
One litre covers 10-20 m²/L



Stain protection that does not alter original tone, texture or colour of the product.

FILA FOB 1L

100086920 - L180300231 - G-940

Use without diluting
One litre covers 10-20 m²/L



Anti-ageing water-repellent protection for interior and exterior surfaces.

FILA HYDROREP 1L

100095177 - L180001173 - G-940

Use without diluting
One litre covers 10-20 m²/L



Colour-enhancing protection for all types of polished, honed, rough and tumbled natural stone.

FILA STONE PLUS 1L

100086921 - L180300228 - G-933

Use without diluting
One litre covers 15-50 m²/L



Pleasant wet-look glossy protection.

FILA WET 1L

100098018 - L180300238 - G-930

Use without diluting
One litre covers 10-20 m²/L



Maintenance kit for the restoration of small marble, travertine and limestone surfaces.

HIGH-END BATHS MAINTENANCE KIT

100143706 - L179702365 - G-535

Use without diluting





TECHNICAL FEATURES

	RESISTANCE TO ABRASION NORMA UNE-EN 14157:2005 (mm)	DETERMINATION OF THE FLEXURAL STRENGTH NORMA UNE-EN 12371:2007 (MPa)	DETERMINATION OF THE FROST RESISTANCE NORMA UNE-EN 12371: 2002 (MPa)	DETERMINATION OF THE UNPOLISHED SLIP RESISTANCE VALUE NORMA UNE-EN 1341: 2002 (USRV)
MARBLES	< 25.0	> 7.0	> 5.0	> 10
TRAVERTINE	< 25.0	> 7.0	> 5.0	> 10
GRANITES	< 17.5	> 8.0	> 7.5	> 55
LIMESTONES	< 25.0	> 7.0	> 5.0	> 15
SLATES	< 39.0	> 21.0	> 7.0	> 25
QUARTZITES	< 29.0	> 16.5	> 10.5	> 45

*The technical specification of all the materials are available on request.



Wall Coverings: Emotions Highland Blanco 15x60x1,4 cm.



RECOMMENDATIONS FOR LAYING, PROTECTING AND SEALING THE JOINTS OF NATURAL STONE.

1. INSTALLATION SUBSTRATE.

The "thin layer" installation method is recommended. Therefore the installation substrate should be dimensionally stable and non-deformable, with any possible contractions due to drying having taken place. The entire surface and thickness of the substrate should be compact. It should be completely free of dust, grease or any other substance that may hinder adhesion. Use a 2-metre rule to check that planarity is not off by more than 2 mm.

2. INSTALLATION.

We recommend the adhesive ONE-FLEX. Its ease of use, excellent adjustability, zero vertical slippage and thixotropic properties give it outstanding performance. Suitable for use both indoors and out. Due to its excellent flexibility and adherence, it can be used with a variety of substrates, such as existing ceramic tiles, floors with built-in heating and outdoor terraces. ONE-FLEX is mixed with water in a proportion of 38 %. The size of the notched trowel used to apply the product will depend on the sizes of the pieces being installed. It is important not to lay tiles so that they are touching one another. They are manufactured in a totally artisanal fashion and the sizes of each tile may vary slightly. Suitable joints should be left between the tiles, proportional to the size of the piece. It is extremely important that floors are given expansion joints. These shall not protect an exterior surface area of more than 16 m². Perimeter expansion joints of 8 to 10 mm should also be left in the different rooms.

3. GROUTING OF INSTALLATION JOINTS.

This process should be carried out 24 hours after the protector has been applied. We recommend the use of the COLORSTUK 2-12 range, as its grain size distribution is in accord with joint size. Mix the product with water until a creamy clot-free paste has been obtained. Use a hard rubber trowel to apply the product, repeatedly passing it over the joints in a diagonal direction. Pick up any excess product with the trowel. The surface should be cleaned with a fine, hard sponge once the grout has begun to harden.

4. PROTECTION OF NATURAL STONE.

All natural stone from L'Antic Colonial is supplied protected (except Multiformats and Nepal Gold). For this purpose, we use a high quality water-oil repellent sealer that protects the stone from moisture, saltpetre and other household stains, while also enhancing the natural colour of the stone. Please note however that the properties of the tile may vary slightly following the application of the protection due to differences in porosity and texture, inherent to the stone. The natural stone supplied protected from the factory is ready for installation. In normal conditions, a further application of any other sealer is not necessary. Nevertheless, an additional application of FILA FOB or FILA STONE PLUS on a pre-protected stone surface is also possible to deepen the tone, protect the joints or for any special circumstances, as required. These are applied as follows: After checking that the stone is thoroughly clean and dry, proceed to apply the protector that best suits our needs. Both protectors should be applied undiluted, using a fine foam roller, in two criss-crossed coats directly on the pieces. The product should only be applied once. If the protection is applied to flooring, avoid walking on the floor until the protector has had time to dry completely. All these products protect the marble from moisture stains, saltpetre and other household stains. Depending on the desired finish, apply one of the following products:

-FILA FOB: Natural Effect.

-FILA STONE PLUS: Intense lustre effect.

5. CARE.

INDOORS: Clean regularly with water and a neutral soap. Depending on the volume of usage, we recommend you protect the floor again, after a thorough clean, should you observe that the protection is wearing away. To clean it, we recommend FilaCleaner. **OUTDOORS:** If the surface is very exposed to the weather, we recommend washing it once a year with a slightly acid solution of FilaCleaner to remove any lime scale that has built up due to the weather conditions. Stone tiles used in outdoor environments tend to change in appearance over the course of time. Traffic, rain, sunlight, etc. all affect the stone's surface, enhancing it in a natural and exclusive manner. To improve the resistance of exterior stone tiling to staining, we recommend the application of one coat of FILAFOB or FILASTONE PLUS every two or three years after first washing the surface with FILACLEANER.

Natural stone is particularly susceptible to variations in shade and thickness; a fact that customers should be made aware of.

L'Antic Colonial offers 4 different natural stone finishes:

Antiqued

Pieces are naturally aged in order to achieve a warm traditional look that fills homes with a classical and personal touch. The variety of colours and formats available can be used to create highly creative layouts.

Reminders:

1. The surfaces of marble and antiqued stone are usually pitted with holes that need to be filled with tile grout.
2. It should be noted that antiqued travertines are not suitable for use as worktops.
3. Larger formats (30 x 30 and above) must be handled with care.

Classic

A soft satiny finish is achieved by brushing the stone surface. In the case of travertines, surface pores are filled with cement beforehand. The classic finish combines all of the ingredients necessary to make it the perfect choice for both highly traditional and cutting-edge settings.

Reminders:

1. Travertine with a classic finish is only recommended for residential use in interiors.
2. Holes may occasionally appear after installation that are easily repaired by filling them in with grout.

Polished

Polished stone is characterised by a high lustre achieved with mechanical processes, making it ideally suited for a host of different decorative applications. It infuses settings with personality and radiance.

Reminders:

1. Delhi, Bombay and Bangalore slate with a polished finish are products with a high degree of bending strength but which may become scratched if they are exposed to heavy traffic. This is an inherent characteristic of the product that should be taken into account, only recommending this product for residential areas with little traffic. Nevertheless, if scratches do appear, they can be lessened by applying a protective treatment for natural stone.
2. Polished Travertine is only recommended for residential use in interiors.
3. Holes may occasionally appear after installation that are easily repaired by filling them in with grout.

Natural Relief

The fascination produced by genuine slate and quartzite increases once it is known that these are natural products suited to any setting. In this same spirit, L'Antic Colonial has maintained this natural relief on some of its slates and quartzite's, while calibrating the underside of pieces to facilitate installation

Reminders:

1. Slate is an exfoliative rock. This means it is made up of different layers, one on top of the other, which may eventually flake off; however, this does not affect product quality.
2. Given the relief of slate, make sure that pieces are blemished as little as possible when grouting joints so as to make cleaning them afterwards easier and to prevent grout from getting lodged in the crevices.

INSTALLATION - CLEANING - MAINTENANCE

STORING DQS

Avoid exposure of tiles to direct sunlight. Do not leave material unprotected IN THE OPEN AIR, prior to installation. Tiles mounted on triangular frames or packed in wooden boxes should be stored indoors wherever possible.

INSTRUCTIONS FOR LAYING

Preparation of the screed

Substrates (screeds) should be thoroughly dry (residual moisture must not exceed 2.5 %), stable, solid, compression-resistant, correctly levelled and free from dust, grease, wax, paints, stripping agents or any other element that may hinder adhesion.

Screed maturity is calculated at between 6 and 8 days per cm thickness, unless quick drying cements are used. Any cement substrate, tiles or marble already in existence should be solid and crack-free, firmly attached to the base, able to resist predicted loads and completed with suitable structural joints.

How and when to lay the tiles

Ambient temperature should be between +5° and +30° C; the residual humidity of the substrate (screed) must not be above 2.5 %; the difference in the level of the substrate must not be greater than 3 mm/l per m. Wet or dry cutting with diamond discs should be used to cut tiles. We recommend that larger tiles are laid using a suction cup. To ensure that all of the tile surface is in contact with the substrate, gently tap the tiles with a rubber mallet to prevent the formation of air bubbles and hollow spaces. To ensure the correct laying and alignment of the tiles, insert nylon spacers between the tiles to keep the joints open.

Recommended adhesives

When installing DQS, the traditional method using sand and cement (mortar) must be avoided at all costs. Instead, we recommend the use of two-component fast drying adhesives, consisting of: component A (sack of cement) and component B (tin of latex), especially designed for use with DQS, and which react well to thermal stress and strain. These should be C2FTE type class S2 (EN12004, EN: 12002).

L'Antic Colonial recommends the use of SUPER ONE+ UNILAX by Butech.

The above recommendation is also valid for use with floors laid over radiant floor heating systems or in very hot climates where the material is subject to significant expansion.

An R2T (EN:12004) adhesive should be used with flooring that will be exposed to direct sunlight.

L'Antic Colonial recommends the use of Politech by Butech.

DQS tiles are supplied finished and ready for laying.

They have been calibrated, ground, polished and bevelled.

DQS tiles absorb the minimum of water as they are manufactured using high pressure vacuum industrial processes. The result is a high level of compacting, compounded by the low percentage of structural polyester resin subject to catalysis while hot. As a result of the compacting and the minimum levels of water absorption, these tiles cannot be laid using the traditional cement and sand (mortar) system, which requires the use of large quantities of water.

If the water cannot escape through the screed or the joints, the DQS tiles may become totally misshapen.

When laying flooring or cladding INDOORS, we recommend the use of two-component adhesives.

For special uses or on certain screeds, we recommend a high performance adhesive (two-component polyurethane adhesive). This permits the adhesion to PVC, metal, wood, etc., especially in moist locations, with the use of large formats and in environments with large swings in temperature (and the resultant risk of expansion), and in zones exposed to sunlight. The adhesive is prepared by pouring hardener B into the mixture and then stirring with a mechanical mixer to obtain a completely uniform paste.

The use of DQS OUTDOORS is not recommended, except in certain specific cases: cladding of well-ventilated walls that use a suitable mechanical anchorage system.

Use of adhesives

The correct use of an adhesive guarantees that the DQS adheres well. We recommend the adhesive is applied with a notched trowel, ensuring that the quantity spread over the substrate (screed) covers at least 80 % of the DQS tiles. To lay larger formats, (60 x 60 cm and larger) and in zones with heavy traffic (hospitals, shopping centres, etc.), we recommend the double gluing system, (adhesive also applied on the reverse of the tile) to ensure that 100 % of the surface is impregnated with the adhesive. Once the tiles have been laid, we recommend placing a weight of approximately 18-20 kg on the 4 corners of the tiles for a few hours, until the adhesive has hardened. This will prevent the corners from curling.

Always follow the instructions and the recommended doses.

The size of the notched trowel will depend on the size of the tiles and the condition of the substrate (screed). We recommend you apply a small amount of adhesive each time, making sure that the tiles are laid within the adhesive laying time.

Grouting the joints

Tiles must never be laid without joints. The width of the joints depends on the size of the tiles in accordance with European legislation.

(Minimum values of 3 to 5 mm):

1 cm wide perimeter joints should be left around walls and around the perimeter of tiled areas. 0.5 cm wide expansion joints should be inserted every 40 m² or every 8 linear metres. DQS has a thermal expansion of between 1.5 and 2 mm per lineal metre for a temperature difference of 40° C. As a result, tile joints of at least 3 mm should be left between tiles.

The joints should be grouted with a high performance mortar ready for use in the required colour. For example, COLORSTUK grouting cement by Butech, adding CL-stuk latex additive to the mix so that any expansion movement by the tiles is absorbed.

Expansion joints

The expansion joints should be cut once the floor has been laid, dividing the flooring into squares measuring 4x4 metres. Joints should be wide enough to be filled with a monocomponent silicone sealant around the perimeter and where they meet walls, columns, steps, etc.

Structural joints

Structural joints must be respected, and should be clearly visible in the screed and specified in the project; in new buildings they should be placed in areas where the ground has settled and "natural" openings have appeared over the years.

Installation in zones subject to direct sunlight

In zones subject to significant exposure to direct sunlight (e.g. by windows, in direct light) the windows should be made using total UV protection glass, and the tiles/panels laid using a fast-drying two-component polyurethane adhesive which offers improved elasticity. In this situation, recomposed quartz is subject to demanding conditions and significant strain.

DQS is not recommended for use OUTDOORS.

INSTRUCTIONS FOR CLEANING AND CARE OF DQS

REGULAR CARE

Required products:

FILACLEANER (a neutral detergent), DETERDEK (a slightly acid detergent).

- FILACLEANER

Solution: 30 g of product to 5 l water.

Coverage: From 25 to 35 m² (using the recommended proportions).

- DETERDEK (do not use with materials containing mother of pearl).

Solution: 1 part product to 2 parts water (1 l per 2 l water).

Coverage: From 70 to 100 m² (using the recommended ratio).

INSTRUCTIONS FOR CLEANING

Clean the surface with our neutral detergent FILACLEANER or the slightly acid detergent DETERDEK, diluted in the recommended proportions. Rinse well after washing.

NOTE FOR MATERIALS THAT ARE HARDER TO CLEAN

From time to time, clear-coloured flooring may need to be cleaned with undiluted DETERDEK; always rinsing the floor well afterwards. Do not use DETERDEK on surfaces containing mother of pearl.

TROUBLESHOOTING

A cloudy surface when seen with the light behind you. The floor stains easily. In most cases, this is because unsuitable cleaning products have been used. These leave a thin surface film behind that makes it easier for dirt to build up.

Product required: DETERDEK (slightly acid detergent)

Solution: undiluted

Coverage: From 20 to 30 m²/l

Recommended cleaning tools: adjustable mop stick + soft white mop.

INSTRUCTIONS FOR CLEANING

- Spread a thin, uniform coat of DETERDEK across the floor and leave for 15 to 30 minutes, rubbing the floor surface from time to time.

- Then rinse well with clean water. Repeat the process if necessary. Never use DETERDEK on surfaces containing mother of pearl.

IMPORTANT NOTE

There are many products on the market for first-time cleaning and the regular care of floors, but they are not all suitable. Avoid acid or alkaline cleaning products, ones containing wax, solvents, ammonia, sodium hypochlorite, Marseille soap or silicon-based products (normally called polysiloxane on the product label). If, as a result of heavy traffic, the colour of the flooring turns grey (in the case of pale-coloured flooring), we recommend you alternate your normal cleaning product with FILACLEANER, a detergent with a neutral pH, and DETERDEK, in the recommended solutions, and rinse well afterwards. By alternating with DETERDEK and FILACLEANER, you will be able to keep your floor absolutely clean. Remember that DETERDEK.